

PS2505-1X, PS2505-2X, PS2505-4X  
PS2505-1, PS2505-2, PS2505-4



**ISOCOM**  
**COMPONENTS**

**HIGH DENSITY A.C. INPUT  
PHOTOTRANSISTOR OPTICALLY  
COUPLED ISOLATORS**

**APPROVALS**

- UL recognised, File No. E91231  
Package code " EE "

**'X' SPECIFICATION APPROVALS**

- VDE 0884 in 3 available lead form :-
  - STD
  - G form
  - SMD approved to CECC 00802
- Certified to EN60950 by Nemko - Certificate No. P01102465

**DESCRIPTION**



The PS2505-1, PS2505-2, PS2505-4 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.

**FEATURES**

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- AC or polarity insensitive input
- All electrical parameters 100% tested
- Custom electrical selections available

**APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Telephone sets, Telephone exchangers
- Signal transmission between systems of different potentials and impedances

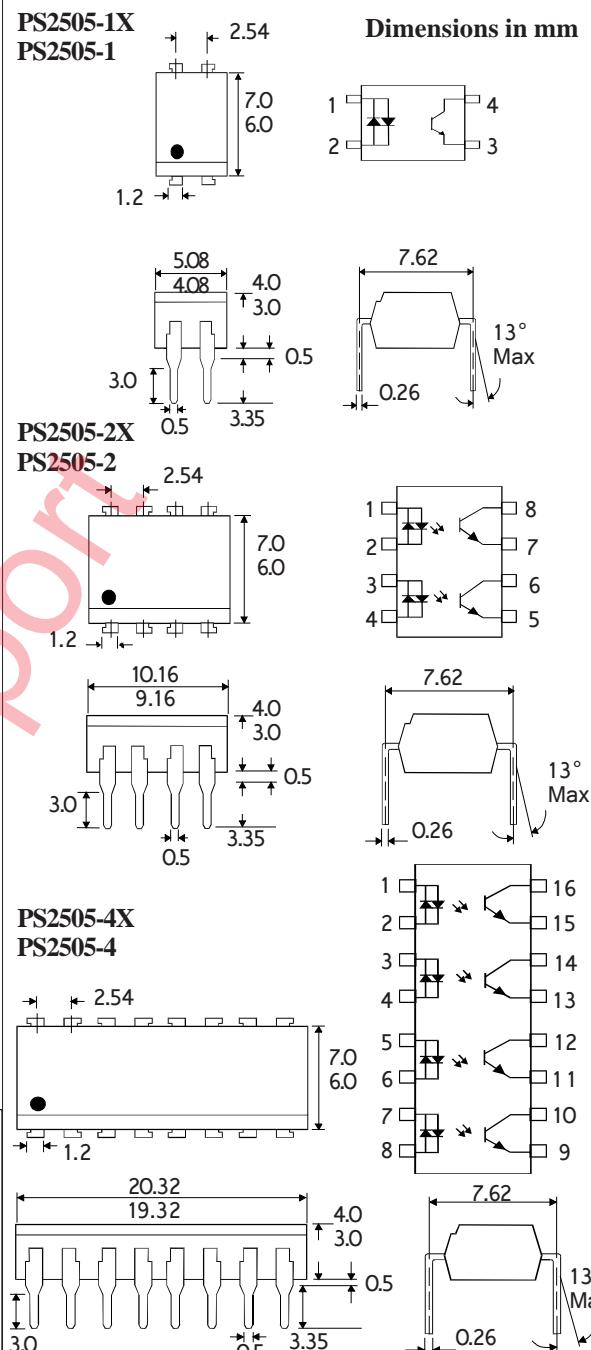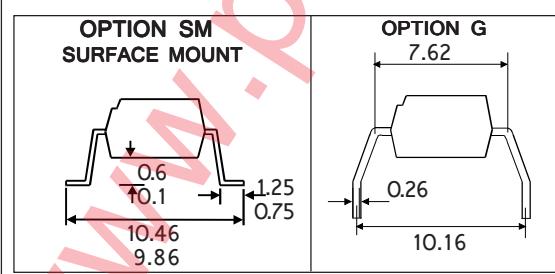

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax :(01429) 863581

**ABSOLUTEMAXIMUMRATINGS**  
(25°C unless otherwise specified)

Storage Temperature	-55°C to +125°C
Operating Temperature	-30°C to +100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUTDIODE**

Forward Current	$\pm 50\text{mA}$
Power Dissipation	70mW

**OUTPUTTRANSISTOR**

Collector-emitter Voltage $\text{BV}_{\text{CEO}}$	80V
Emitter-collector Voltage $\text{BV}_{\text{ECO}}$	6V
Collector Current	50mA
Power Dissipation	150mW

**POWERDISSIPATION**

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )		1.2	1.4	V	$I_F = \pm 10\text{mA}$
Output	Collector-emitter Breakdown ( $\text{BV}_{\text{CEO}}$ ) ( Note 2 )	80			V	$I_C = 1\text{mA}$
	Emitter-collector Breakdown ( $\text{BV}_{\text{ECO}}$ )	6		100	V nA	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current ( $I_{\text{CEO}}$ )					$V_{\text{CE}}=20\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2) PS2505-1, PS2505-2, PS2505-4	80		600	%	$\pm 5\text{mA} I_F, 5\text{V} V_{\text{CE}}$
	Collector-emitter Saturation Voltage $V_{\text{CE(SAT)}}$			0.3	V	$\pm 10\text{mA} I_F, 2\text{mA} I_C$
	Input to Output Isolation Voltage $V_{\text{ISO}}$	5300 7500			$V_{\text{RMS}}$ $V_{\text{PK}}$	See note 1 See note 1
	Input-output Isolation Resistance $R_{\text{ISO}}$	$5 \times 10^{10}$			$\Omega$	$V_{\text{IO}} = 500\text{V}$ (note 1)
	Output Rise Time $t_r$		4		$\mu\text{s}$	$V_{\text{CE}}=2\text{V},$
	Output Fall Time $t_f$		3		$\mu\text{s}$	$I_C=2\text{mA}, R_L=100\Omega$

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory

