


KBPC8005 Thru KBPC810




8 AMP SILICON BRIDGE RECTIFIER

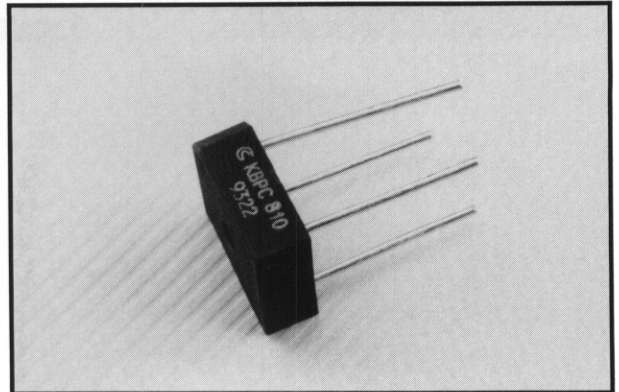

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Surge overload rating to 125 Amperes peak
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- UL recognized: File #E106441
- UL recognized 94V-O plastic material

Outline Drawing

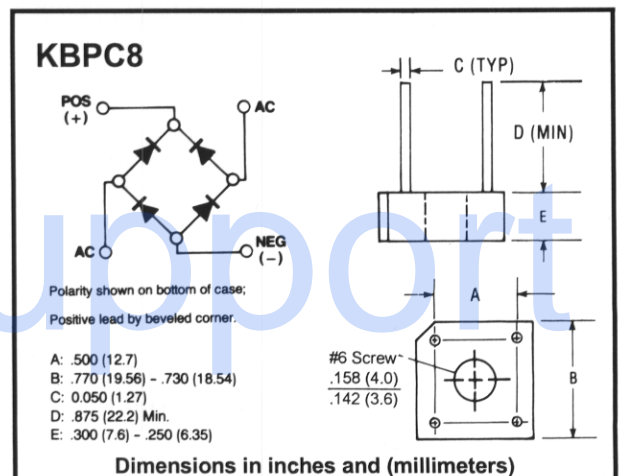

Mechanical Data

- Case: Molded Plastic
- Leads: Silver plated copper
- Lead solderable per MIL-STD-202, Method 208
- Mounting through hole for #6 screw mounting
- Weight: 0.18 ounce, 5.4 grams

Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

		KBPC 8005	KBPC 801	KBPC 802	KBPC 804	KBPC 806	KBPC 808	KBPC 810	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	60	100	200	400	600	800	1000	V	
Maximum Average Forward Output Current	$I_{(AV)}$	@ $T_C = 50^\circ C^*$ @ $T_A = 50^\circ C^{**}$				8.0				A
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	I_{FSM}					125				A
Maximum DC Forward Voltage Drop per Element At 4.0A DC	V_F					1.1				V
Maximum DC Reverse Current at rated DC Blocking Voltage per Element	I_R					10				μA mA
$I^2 t$ Rating for Fusing ($t < 8.3ms$)	$I^2 t$					64				$A^2 S$
Typical Thermal Resistance	R_{THJC}					6				$^\circ C/W$
Operating Temperature Range	T_J					-55 to +125				$^\circ C$
Storage Temperature Range	T_{STG}					-55 to +150				$^\circ C$

Note: * Unit mounted on metal chassis
** Unit mounted on P.C. board