
Bussmann[®]

SFE

Automotive Glass Fuses Fast-Acting 32 Volts, 4-30 Amps



Catalog	"A"		
Symbol &	Length		
Amps	Inches	mm	
SFE-4	5/8	15.9	
SFE-6	3/4	19.0	
SFE-7-1/2	7/8	22.2	
SFE-9	7/8	22.2	
SFE-14	1-1/16	27.0	
SFE-20	1-1/4	31.7	
SFE-30	1-7/16	36.5	

CATALOG SYMBOL: SFE FAST-ACTING 4 TO 30 AMPERES 32 VOLTS OR LESS **U.L. LISTED** (GUIDE #FHXT, FILE #AU169)

Carton Quar	tity and Weight			
Am <mark>per</mark> e	Carton	Weight*		
Ratings	Qty –	Lbs.	Kg.	
SFE-4	100	0.73	0.331	
SFE-6	100	0.75	0.340	
SFE-7-1/2	100	0.80	0.363	
SFE-9	100	0.80	0.363	
SFE-14	100	0.82	0.372	
SFE-20	100	0.87	0.395	
SFE-30	100	1.60	0.762	

* Weight per carton.

In-line Fuseholders

	Catalog Number				
Wire Length	Fuse	Fuse & Holder (w/leads)	Holder Only (No Leads)		
	SFE-20	HRJ	*HHJ-A, HHJ-B		
19"	SFE-14	HRI	*HHI-A, HHI-B		
(#14	SFE-9	HRH	HHH-A		
Wire)	SFE-7-1/2	HRE	HHH-A		
	SFE-6	HRG	HIG-A		
	SFE-4	HRF	HIR-A		
	SFE-20	HMJ	*HDJ-A, HDJ-B		
8"	SFE-14	HMI	*HDI-A, HDI-B		
(#14	SFE-9	HMH	_		
Wire)	SFE-7-1/2	HME	_		
	SFE-6	HMG	_		
	SFE-4	HMF	_		
*-A: Crimp c	onnections for #18 -	#22 wire.			


-B: Crimp connections for #12 - #16 wire.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



- For automotive circuits.
- · Visual indicating glass tubing.
- Made to SAE specifications.
- · Physical size varies with electrical rating of fuse to prevent over-fusing.
- For mounting in in-line holders, and 1/4" clips.

Time-Current Characteristics-Total Clear

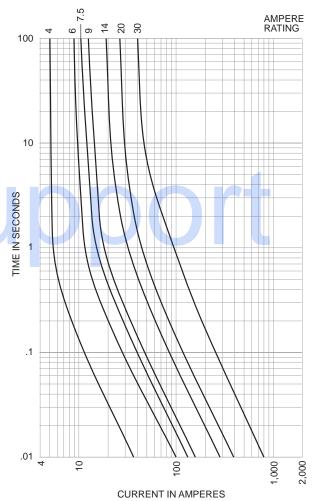

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cooper Bussmann: BK-SFE-20YX BK-HHJ-1K0118

Eaton:

BK/SFE-14 BK/HHJ-A-R BK/HHJ-B-R BK/HHJ-A BK/HHJ-B BK/SFE-6 HHI-A HHJ-A-R BK/HHI-B HHH-A BK/SFE-20YX BK/HHJ-1K0118