


**Data Sheet 1242 Rev.B**

**Features**

- Glass Passivated Die Construction
- 500W Peak Pulse Power Dissipation
- 5.0V – 170V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O
- UL Recognized File # E224235

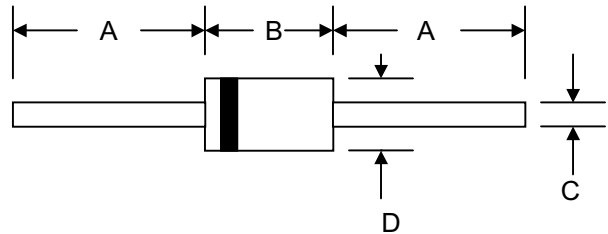

**Mechanical Data**

- Case: JEDEC DO-15 Low Profile Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking:  
Unidirectional – Device Code and Cathode Band  
Bidirectional – Device Code Only
- Weight: 0.40 grams (approx.)

DO-15				
Dim	Min	Max	Min	Max
A	25.4	—	1.000	—
B	5.50	7.62	0.217	0.300
C	0.71	0.864	0.028	0.034
D	2.60	3.60	0.102	0.142
	In mm		In inch	

“C” Suffix Designates Bi-directional Devices  
 “A” Suffix Designates 5% Tolerance Devices  
 No Suffix Designates 10% Tolerance Devices

**Maximum Ratings and Electrical Characteristics** @ $T_A=25^{\circ}\text{C}$  unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Pulse Power Dissipation at $T_A = 25^{\circ}\text{C}$ (Note 1, 2, 5) Figure 1	PPPM	500	W
Peak Forward Surge Current per Figure 6 (Note 3)	IFSM	70	A
Peak Pulse Current on 10/1000 $\mu\text{S}$ Waveform (Note 1) Figure 3	IPPM	See Table 1	A
Steady State Power Dissipation (Note 2, 4)	PM(AV)	3.0	W
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +175	$^{\circ}\text{C}$

- Note: 1. Non-repetitive current pulse, per Figure 3 and derated above  $T_A = 25^{\circ}\text{C}$  per Figure 2  
 2. Mounted on 40mm<sup>2</sup> copper pad  
 3. 8.3ms single half sine-wave duty cycle = 4 pulses per minutes maximum  
 4. Lead temperature at  $75^{\circ}\text{C} = T_L$   
 5. Peak pulse power waveform is 10/1000 $\mu\text{S}$

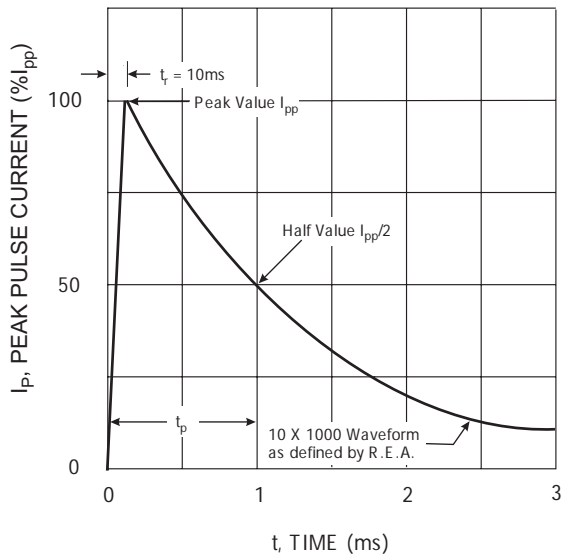


Fig. 1 Pulse Waveform

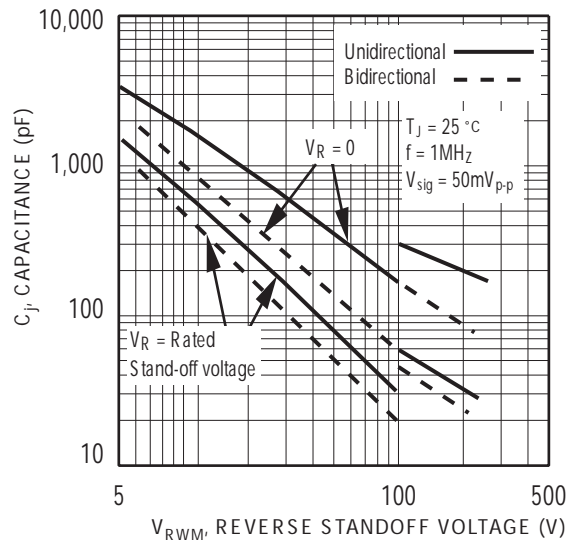


Fig. 2 Typical Junction Capacitance

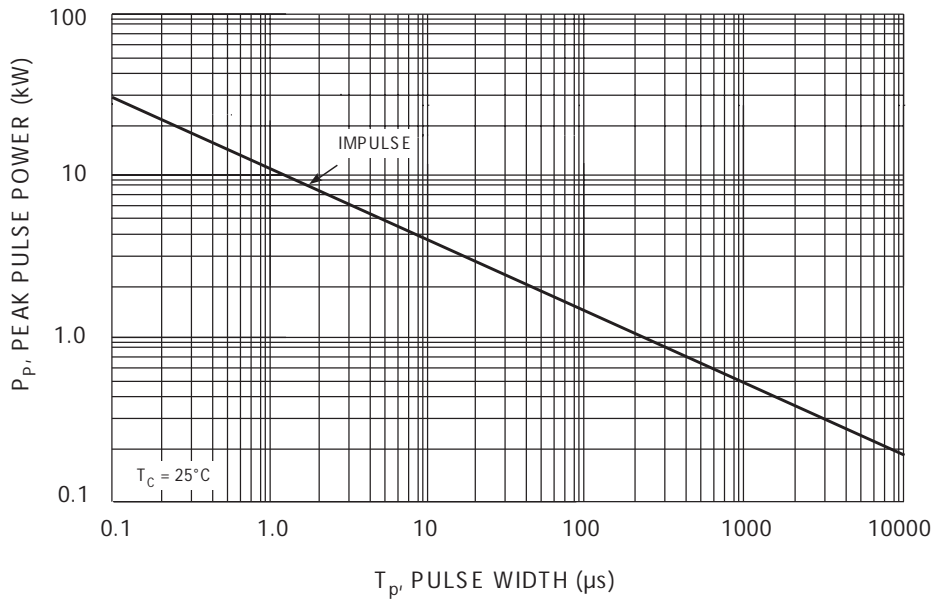


Fig. 3 Pulse Rating Curve

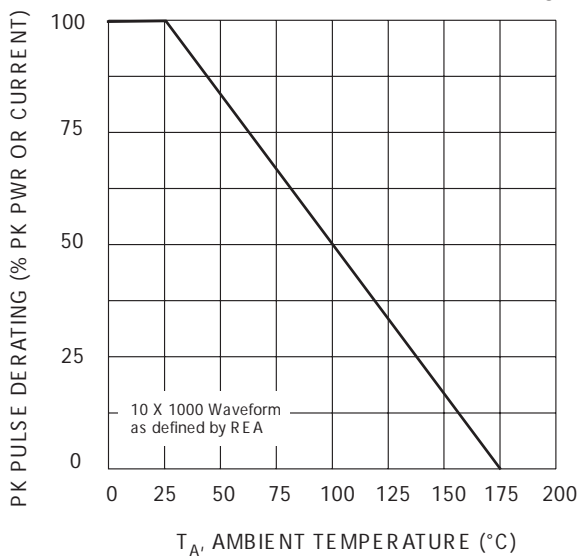


Fig. 4 Pulse Derating Curve

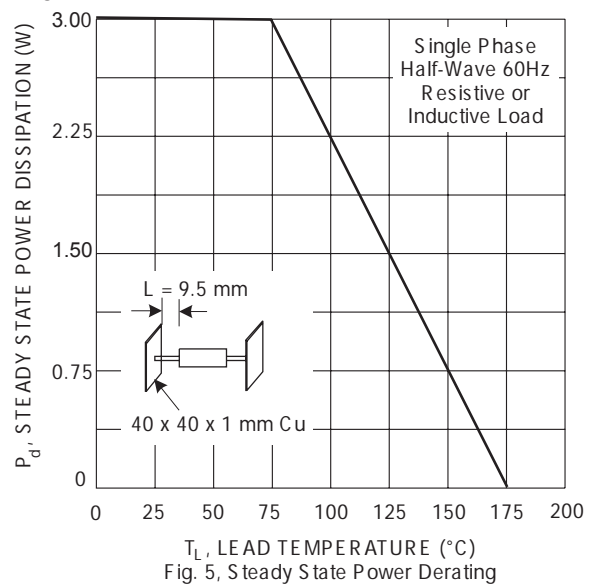


Fig. 5 Steady State Power Derating

# UNI-DIRECTIONAL 500 WATT AXIAL LEAD TVS

UNI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
SA5.0	5.00	6.40	7.82	10	9.6	52.3	600
SA5.0A	5.00	6.40	7.00	10	9.2	54.3	600
SA6.0	6.00	6.67	8.15	10	11.4	43.9	600
SA6.0A	6.00	6.67	7.37	10	10.3	48.5	600
SA6.5	6.50	7.22	8.82	10	12.3	40.7	400
SA6.5A	6.50	7.22	7.98	10	11.2	44.7	400
SA7.0	7.00	7.78	9.51	10	13.3	37.8	150
SA7.0A	7.00	7.78	8.60	10	12.0	41.7	150
SA7.5	7.50	8.33	10.20	1	14.3	35.0	50
SA7.5A	7.50	8.33	9.21	1	12.9	38.8	50
SA8.0	8.00	8.99	10.90	1	15.0	33.3	25
SA8.0A	8.00	8.99	9.83	1	13.6	36.7	25
SA8.5	8.50	9.44	11.50	1	15.9	31.4	10
SA8.5A	8.50	9.44	10.40	1	14.4	34.7	10
SA9.0	9.00	10.00	12.20	1	16.9	29.5	5
SA9.0A	9.00	10.00	11.10	1	15.4	32.5	5
SA10	10.00	11.10	13.60	1	18.8	26.6	3
SA10A	10.00	11.10	12.30	1	17.0	29.4	3
SA11	11.00	12.20	14.90	1	20.1	24.9	3
SA11A	11.00	12.20	13.50	1	18.2	27.4	3
SA12	12.00	13.30	16.30	1	22.0	22.7	3
SA12A	12.00	13.30	14.70	1	19.9	25.1	3
SA13	13.00	14.40	17.60	1	23.8	21.0	3
SA13A	13.00	14.40	15.90	1	21.5	23.2	3
SA14	14.00	15.60	19.10	1	25.8	19.4	3
SA14A	14.00	15.60	17.20	1	23.2	21.5	3
SA15	15.00	16.70	20.40	1	26.9	18.8	3
SA15A	15.00	16.70	18.50	1	24.4	20.6	3
SA16	16.00	17.80	21.80	1	28.8	17.6	3
SA16A	16.00	17.80	19.70	1	26.0	19.2	3
SA17	17.00	18.90	23.10	1	30.5	16.4	3
SA17A	17.00	18.90	20.90	1	27.6	16.1	3
SA18	18.00	20.00	24.40	1	32.2	15.5	3
SA18A	18.00	20.00	22.10	1	29.2	17.2	3
SA20	20.00	22.20	27.10	1	35.8	13.9	3
SA20A	20.00	22.20	24.50	1	32.4	15.4	3
SA22	22.00	24.40	29.80	1	39.4	12.7	3
SA22A	22.00	24.40	26.90	1	35.5	14.1	3
SA24	24.00	26.70	32.60	1	43.0	11.6	3
SA24A	24.00	26.70	29.50	1	38.9	12.8	3
SA26	26.00	28.90	35.30	1	46.6	10.7	3
SA26A	26.00	28.90	31.90	1	42.1	11.9	3
SA28	28.00	31.10	38.00	1	50.0	9.9	3
SA28A	28.00	31.10	34.40	1	45.4	11.0	3
SA30	30.00	33.30	40.70	1	53.5	9.3	3
SA30A	30.00	33.30	36.80	1	48.4	10.3	3
SA33	33.00	36.70	44.90	1	59.0	8.5	3
SA33A	33.00	36.70	40.60	1	53.3	9.4	3
SA36	36.00	40.00	48.90	1	64.3	7.8	3
SA36A	36.00	40.00	44.20	1	58.1	8.6	3
SA40	40.00	44.40	54.30	1	71.4	7.0	3
SA40A	40.00	44.40	49.10	1	64.5	7.8	3
SA43	43.00	47.80	58.40	1	76.6	6.5	3
SA43A	43.00	47.80	52.80	1	69.4	7.2	3
SA45	45.00	50.00	61.10	1	80.3	6.2	3
SA45A	45.00	50.00	55.30	1	72.7	6.9	3
SA48	48.00	53.30	65.10	1	85.5	5.8	3
SA48A	48.00	53.30	58.90	1	77.4	6.5	3
SA51	51.00	56.70	69.30	1	91.1	5.5	3
SA51A	51.00	56.70	62.70	1	82.4	6.1	3
SA54	54.00	60.00	73.30	1	96.3	5.2	3
SA54A	54.00	60.00	66.30	1	87.1	5.7	3
SA58	58.00	64.40	78.70	1	103.0	4.9	3
SA58A	58.00	64.40	71.20	1	93.6	5.3	3
SA60	60.00	66.70	81.50	1	107.0	4.7	3
SA60A	60.00	66.70	73.70	1	96.8	5.2	3
SA64	64.00	71.10	86.90	1	114.0	4.4	3
SA64A	64.00	71.10	78.60	1	103.0	4.9	3
SA70	70.00	77.80	95.10	1	125.0	4.0	3
SA70A	70.00	77.80	86.00	1	113.0	4.4	3
SA75	75.00	83.30	102.00	1	134.0	3.7	3
SA75A	75.00	83.30	92.10	1	121.0	4.1	3
SA78	78.00	86.70	106.00	1	139.0	3.6	3
SA78A	78.00	86.70	95.80	1	126.0	4.0	3
SA85	85.00	94.40	115.00	1	151.0	3.3	3
SA85A	85.00	94.40	104.00	1	137.0	3.6	3
SA90	90.00	100.00	122.00	1	160.0	3.1	3
SA90A	90.00	100.00	111.00	1	146.0	3.4	3
SA100	100.00	111.00	136.00	1	179.0	2.8	3
SA100A	100.00	111.00	123.00	1	162.0	3.1	3
SA110	110.00	122.00	149.00	1	196.0	2.6	3
SA110A	110.00	122.00	135.00	1	177.0	2.8	3
SA120	120.00	133.00	163.00	1	214.0	2.3	3
SA120A	120.00	133.00	147.00	1	193.0	2.0	3
SA130	130.00	144.00	176.00	1	231.0	2.2	3
SA130A	130.00	144.00	159.00	1	209.0	2.4	3
SA150	150.00	167.00	204.00	1	269.0	1.9	3
SA150A	150.00	167.00	185.00	1	243.0	2.1	3
SA160	160.00	178.00	218.00	1	287.0	1.7	3
SA160A	160.00	178.00	197.00	1	259.0	1.9	3
SA170	170.00	189.00	231.00	1	304.0	1.6	3
SA170A	170.00	189.00	209.00	1	275.0	1.8	3

## BI-DIRECTIONAL 500 WATT AXIAL LEAD TVS

BI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
SA5.0C	5.00	6.40	7.82	10	9.6	52.3	1200
SA5.0CA	5.00	6.40	7.00	10	9.2	54.3	1200
SA6.0C	6.00	6.67	8.15	10	11.4	43.9	1200
SA6.0CA	6.00	6.67	7.37	10	10.3	48.5	1200
SA6.5C	6.50	7.22	8.82	10	12.3	40.7	800
SA6.5CA	6.50	7.22	7.98	10	11.2	44.7	800
SA7.0C	7.00	7.78	9.51	10	13.3	37.8	300
SA7.0CA	7.00	7.78	8.60	10	12.0	41.7	300
SA7.5C	7.50	8.33	10.20	1	14.3	35.0	100
SA7.5CA	7.50	8.33	9.21	1	12.9	38.8	100
SA8.0C	8.00	8.99	10.90	1	15.0	33.3	50
SA8.0CA	8.00	8.99	9.83	1	13.6	36.7	50
SA8.5C	8.50	9.44	11.50	1	15.9	31.4	20
SA8.5CA	8.50	9.44	10.40	1	14.4	34.7	20
SA9.0C	9.00	10.00	12.20	1	16.9	29.5	5
SA9.0CA	9.00	10.00	11.10	1	15.4	32.5	5
SA10C	10.00	11.10	13.60	1	18.8	26.6	3
SA10CA	10.00	11.10	12.30	1	17.0	29.4	3
SA11C	11.00	12.20	14.90	1	20.1	24.9	3
SA11CA	11.00	12.20	13.50	1	18.2	27.4	3
SA12C	12.00	13.30	16.30	1	22.0	22.7	3
SA12CA	12.00	13.30	14.70	1	19.9	25.1	3
SA13C	13.00	14.40	17.60	1	23.8	21.0	3
SA13CA	13.00	14.40	15.90	1	21.5	23.2	3
SA14C	14.00	15.60	19.10	1	25.8	19.4	3
SA14CA	14.00	15.60	17.20	1	23.2	21.5	3
SA15C	15.00	16.70	20.40	1	26.9	18.8	3
SA15CA	15.00	16.70	18.50	1	24.4	20.6	3
SA16C	16.00	17.80	21.80	1	28.8	17.6	3
SA16CA	16.00	17.80	19.70	1	26.0	19.2	3
SA17C	17.00	18.90	23.10	1	30.5	16.4	3
SA17CA	17.00	18.90	20.90	1	27.6	16.1	3
SA18C	18.00	20.00	24.40	1	32.2	15.5	3
SA18CA	18.00	20.00	22.10	1	29.2	17.2	3
SA20C	20.00	22.20	27.10	1	35.8	13.9	3
SA20CA	20.00	22.20	24.50	1	32.4	15.4	3
SA22C	22.00	24.40	29.80	1	39.4	12.7	3
SA22CA	22.00	24.40	26.90	1	35.5	14.1	3
SA24C	24.00	26.70	32.60	1	43.0	11.6	3
SA24CA	24.00	26.70	29.50	1	38.9	12.8	3
SA26C	26.00	28.90	35.30	1	46.6	10.7	3
SA26CA	26.00	28.90	31.90	1	42.1	11.9	3
SA28C	28.00	31.10	38.00	1	50.0	9.9	3
SA28CA	28.00	31.10	34.40	1	45.4	11.0	3
SA30C	30.00	33.30	40.70	1	53.5	9.3	3
SA30CA	30.00	33.30	36.80	1	48.4	10.3	3
SA33C	33.00	36.70	44.90	1	59.0	8.5	3
SA33CA	33.00	36.70	40.60	1	53.3	9.4	3
SA36C	36.00	40.00	48.90	1	64.3	7.8	3
SA36CA	36.00	40.00	44.20	1	58.1	8.6	3
SA40C	40.00	44.40	54.30	1	71.4	7.0	3
SA40CA	40.00	44.40	49.10	1	64.5	7.8	3
SA43C	43.00	47.80	58.40	1	76.6	6.5	3
SA43CA	43.00	47.80	52.80	1	69.4	7.2	3
SA45C	45.00	50.00	61.10	1	80.3	6.2	3
SA45CA	45.00	50.00	55.30	1	72.7	6.9	3
SA48C	48.00	53.30	65.10	1	85.5	5.8	3
SA48CA	48.00	53.30	58.90	1	77.4	6.5	3
SA51C	51.00	56.70	69.30	1	91.1	5.5	3
SA51CA	51.00	56.70	62.70	1	82.4	6.1	3
SA54C	54.00	60.00	73.30	1	96.3	5.2	3
SA54CA	54.00	60.00	66.30	1	87.1	5.7	3
SA58C	58.00	64.40	78.70	1	103.0	4.9	3
SA58CA	58.00	64.40	71.20	1	93.6	5.3	3
SA60C	60.00	66.70	81.50	1	107.0	4.7	3
SA60CA	60.00	66.70	73.70	1	96.8	5.2	3
SA64C	64.00	71.10	86.90	1	114.0	4.4	3
SA64CA	64.00	71.10	78.60	1	103.0	4.9	3
SA70C	70.00	77.80	95.10	1	125.0	4.0	3
SA70CA	70.00	77.80	86.00	1	113.0	4.4	3
SA75C	75.00	83.30	102.00	1	134.0	3.7	3
SA75CA	75.00	83.30	92.10	1	121.0	4.1	3
SA78C	78.00	86.70	106.00	1	139.0	3.6	3
SA78CA	78.00	86.70	95.80	1	126.0	4.0	3
SA85C	85.00	94.40	115.00	1	151.0	3.3	3
SA85CA	85.00	94.40	104.00	1	137.0	3.6	3
SA90C	90.00	100.00	122.00	1	160.0	3.1	3
SA90CA	90.00	100.00	111.00	1	146.0	3.4	3
SA100C	100.00	111.00	136.00	1	179.0	2.8	3
SA100CA	100.00	111.00	123.00	1	162.0	3.1	3
SA110C	110.00	122.00	149.00	1	196.0	2.6	3
SA110CA	110.00	122.00	135.00	1	177.0	2.8	3
SA120C	120.00	133.00	163.00	1	214.0	2.3	3
SA120CA	120.00	133.00	147.00	1	193.0	2.0	3
SA130C	130.00	144.00	176.00	1	231.0	2.2	3
SA130CA	130.00	144.00	159.00	1	209.0	2.4	3
SA150C	150.00	167.00	204.00	1	269.0	1.9	3
SA150CA	150.00	167.00	185.00	1	243.0	2.1	3
SA160C	160.00	178.00	218.00	1	287.0	1.7	3
SA160CA	160.00	178.00	197.00	1	259.0	1.9	3
SA170C	170.00	189.00	231.00	1	304.0	1.6	3
SA170CA	170.00	189.00	209.00	1	275.0	1.8	3

# **SENSITRON**

---

## **SEMICONDUCTOR**

---

**DISCLAIMER:**

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.