


*1 Article	CR04 (CR1/32)	CR06 (CR1/20)	CR10 (CR1/16S)	CR16 (CR1/16)	CR20 (CR1/10)	CR32 (CR1/8)	CR35 (CR1/4)	CR50 (CR1/2)	CR64 (CR1)
Size Code inch	01005	0201	0402	0603	0805	1206	1210	2010	2512
Size Code mm	0402	0603	1005	1608	2012	3216	3225	5025	6432


\*1 ( ): Conventional Type No.

■ Construction

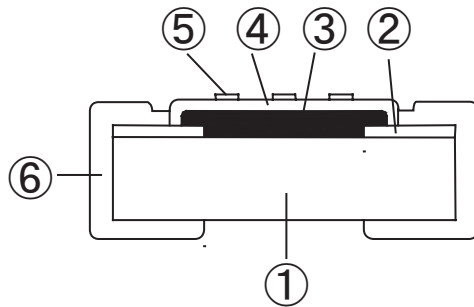

Symbol	Material List
①	Alumina substrate
②	Conductor
③	Resistive film
④	Over coat
⑤	Marking *2
⑥	Side termination


(0Ω Type)

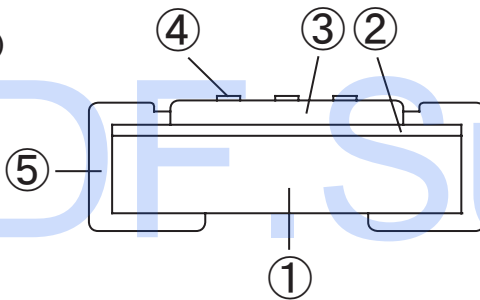

Symbol	Material List
①	Alumina substrate
②	Conductor
③	Over coat
④	Marking *2
⑤	Side termination

\*2 No marking on CR04, CR06, CR10, CR16 (E-96 Series)

■ Type Designation

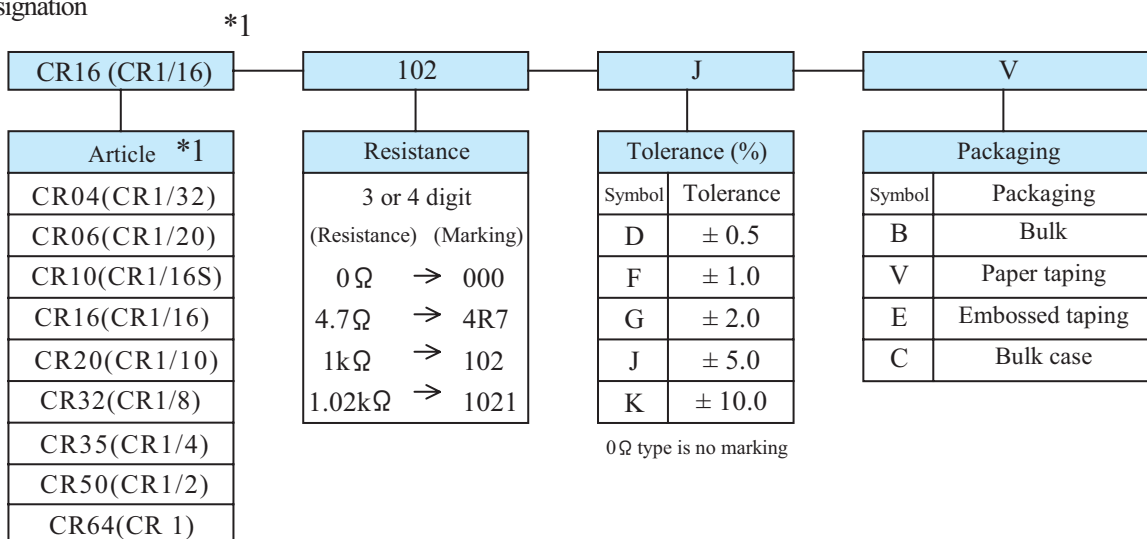



## Rating

*1 Article	Rated Wattage (%)	Tolerance (%)		Resistance Range E-24, E-96 Series Standard (%)	T.C.R. ( $\Omega$ )	Max. Working Voltage (%)	Max. Overload Voltage (%)	0 $\Omega$ Type					
								Rated Current (A)	Resistance ( $\Omega$ )				
CR04 (CR1/32)	0.03	F	$\pm 1$	10 ~ 1M	$\pm 250$	15	30	0.3	Max. 50m $\Omega$				
		G	$\pm 2$	10 ~ 1M	$\pm 250$								
		J	$\pm 5$	10 ~ 1M	$\pm 250$								
CR06 (CR1/20)	0.050	F	$\pm 1$	10 ~ 1M	$\pm 200$	25	50			0.5	Max. 50m $\Omega$		
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	10 ~ 10M 1 ~ 9.1	$\pm 200$ $\pm 400$								
CR10 (CR1/16S)	0.063	D	$\pm 0.5$	100 ~ 1M	$\pm 50$	50	100					1.0	Max. 50m $\Omega$
		D	$\pm 0.5$	10 ~ 91	$\pm 100$								
		F	$\pm 1$	10 ~ 1M	$\pm 100$								
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	10 ~ 10M 1 ~ 9.1	$\pm 200$ $\pm 300$								
CR16 (CR1/16)	0.100	D	$\pm 0.5$	100 ~ 100k	$\pm 50$	50	100	1.0	Max. 50m $\Omega$				
		D	$\pm 0.5$	100 ~ 976	$\pm 100$								
		F	$\pm 1$	10 ~ 1M	$\pm 100$								
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	1 ~ 4.3 4.7 ~ 3.3M 3.6M ~ 10M	-100 ~ +600 $\pm 200$ $\pm 300$								
CR20 (CR1/10)	0.125	D	$\pm 0.5$	100 ~ 100k	$\pm 100$	150	200			1.5	Max. 50m $\Omega$		
		F	$\pm 1$	10 ~ 1M	$\pm 100$								
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	1 ~ 4.3 4.7 ~ 3.3M 3.6M ~ 10M	-100 ~ +600 $\pm 200$ $\pm 300$								
		K	$\pm 10$	11M ~ 22M	$\pm 300$								
CR32 (CR1/8)	0.250	D	$\pm 0.5$	100 ~ 100k	$\pm 100$	200	400	2.0	Max. 50m $\Omega$				
		F	$\pm 1$	10 ~ 1M	$\pm 100$								
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	1 ~ 4.3 4.7 ~ 3.3M 3.6M ~ 10M	-100 ~ +600 $\pm 200$ $\pm 300$								
		K	$\pm 10$	11M ~ 22M	$\pm 300$								
CR35 (CR1/4)	0.250	F	$\pm 1$	10 ~ 1M	$\pm 100$	200	400			2.0	Max. 50m $\Omega$		
		G	$\pm 2$	10 ~ 1M	$\pm 200$								
		J	$\pm 5$	1 ~ 4.3 4.7 ~ 3.3M 3.6M ~ 10M	-100 ~ +600 $\pm 200$ $\pm 300$								
CR50 (CR1/2)	0.500	G	$\pm 2$	10 ~ 1M	$\pm 300$	200	400					2.0	Max. 50m $\Omega$
		J	$\pm 5$	1 ~ 1M	$\pm 500$								
CR64 (CR1)	1.000	J	$\pm 5$	1 ~ 9.1 10 ~ 1M	$\pm 500$ $\pm 300$	200	400	2.0	Max. 50m $\Omega$				

\*1 ( ): Conventional Type No.

★ Operating temperature range :  $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

★ E-96 series resistance values are available for D class F class.

★ Please apply the rated voltage or lower.

$$\text{Rated voltage is calculated by } E = \sqrt{PR}$$


E = Rated Voltage (V)

P = Rated Power (W)

R = Resistance ( $\Omega$ )

★ In case rated voltage calculation is excess of maximum working voltage, maximum or lower voltage be applied.

## Dimension

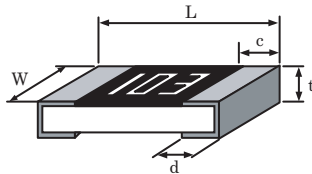


Article *1	L	W	c	d	t
CR04 (CR1/32)	0.40 ± 0.02	0.20 ± 0.02	0.10 ± 0.03	0.10 ± 0.03	0.12 ± 0.02
CR06 (CR1/20)	0.60 ± 0.03	0.30 ± 0.03	0.12 ± 0.05	0.15 ± 0.05	0.23 ± 0.03
CR10 (CR1/16S) LCR10 (LCR1/16S)	1.00 ± 0.05	0.50 ± 0.05	0.20 ± 0.10	0.25 ± 0.10	0.35 ± 0.05
CR16 (CR1/16), LCR16 (LCR1/16) FCR16 (FCR1/16)	1.60 ± 0.15	0.80 <sup>+0.20</sup> -0.10	0.25 ± 0.20	0.25 ± 0.20	0.50 <sup>+0.15</sup> -0.05
CR20 (CR1/10), LCR20 (LCR1/10) UCR20 (UCR1/10), FCR20 (FCR1/10)	2.00 <sup>+0.20</sup> -0.10	1.25 <sup>+0.20</sup> -0.10	0.40 ± 0.20	0.40 ± 0.20	0.50 <sup>+0.15</sup> -0.05
CR32 (CR1/8), LCR32 (LCR1/8) ECR32, FCR32 (FCR1/8)	3.20 <sup>+0.10</sup> -0.15	1.60 <sup>+0.10</sup> -0.15	0.50 ± 0.20	0.50 ± 0.20	0.55 <sup>+0.15</sup> -0.05
CR35 (CR1/4), LCR35 (LCR1/4) FCR35 (FCR1/4)	3.20 <sup>+0.10</sup> -0.15	2.60 <sup>+0.10</sup> -0.15	0.50 ± 0.20	0.50 ± 0.20	0.55 <sup>+0.15</sup> -0.05
CR50 (CR1/2), LCR50 (LCR1/2) ECR50, FCR50 (FCR1/2)	5.00 ± 0.20	2.50 ± 0.20	0.60 ± 0.25	0.60 ± 0.25	0.56 ± 0.15
CR64 (CR1) LCR64 (LCR1)	6.30 ± 0.20	3.20 ± 0.20	0.60 ± 0.25	0.60 ± 0.25	0.56 ± 0.15

\*1 ( ): Conventional Type No.


## Power rating

For resistors operated in ambient temperature above 70 °C, power rating must be derated in accordance with the derating curve.

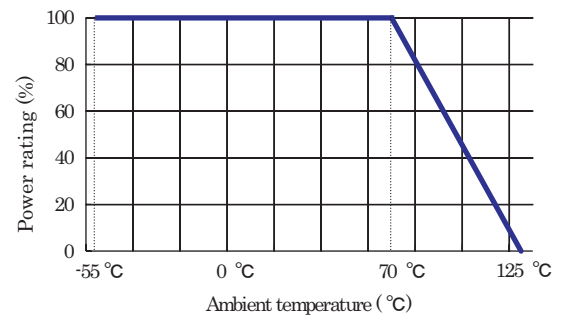

## Surface temperature

Surface temperature rise is shown in this figure.  
Please notice that CR50 and CR64 have high temperature rise when Loaded 100%.

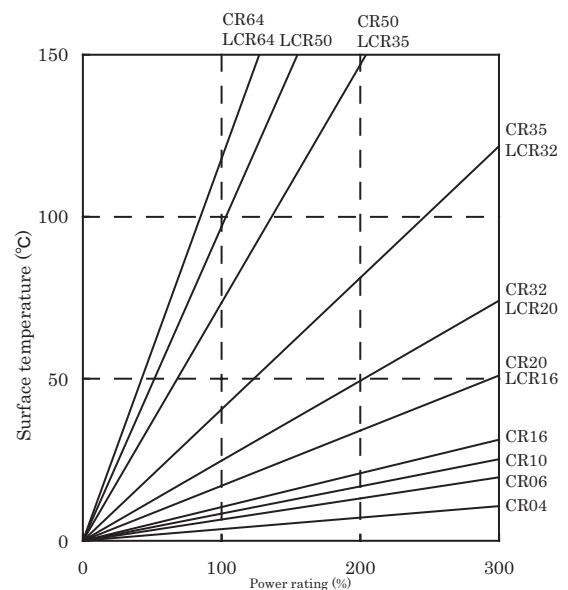

## Packaging

Refer page 12