RGSC-Series



The RGSC-Series Super Curvette rocker switches offer the Curvette styling in a double pole construction with higher electrical ratings and high inrush capabilities. These switches can handle up to 125 amp peak inrush current and can accommodate a wide range of panel cutouts due to the patented mounting ear construction. International ratings are available up to 20 amps.

Specifications

- Certifications*: UL, CSA, VDE
- Dielectric Strength: 1,000V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon

* Due to ongoing technological advances, consult factory for certification specifics.

Dimensional Specifications: in. [mm]

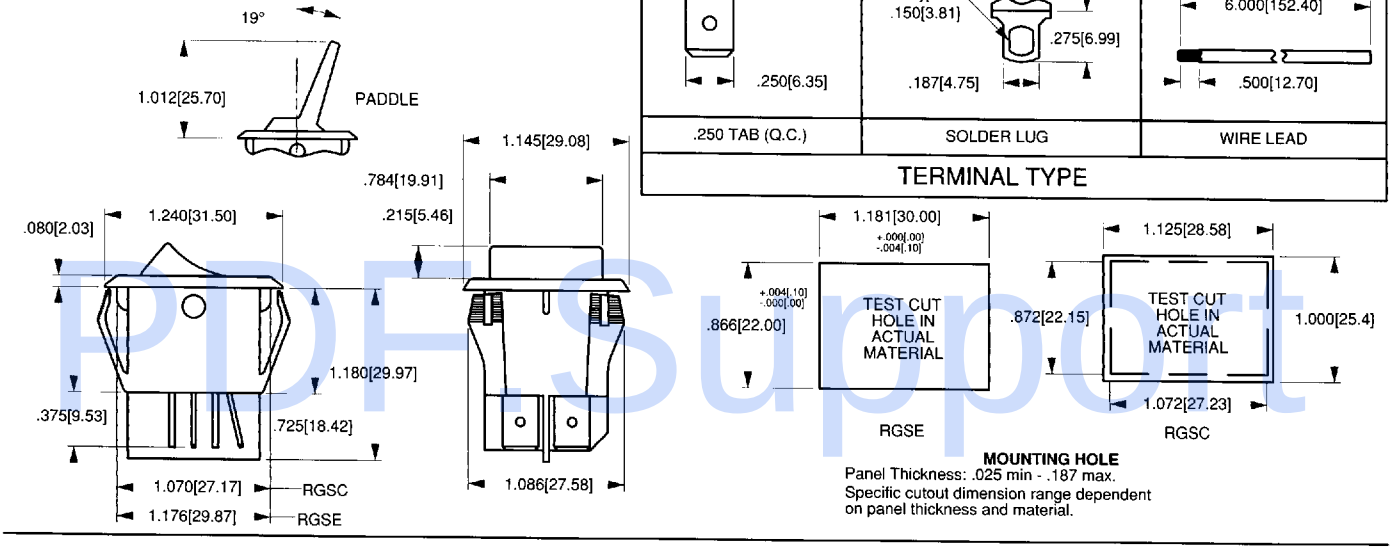

PDF Support

RGSC C 70 1 - R - B - B - 0

SERIES

- **RGSC** STANDARD BASE
- **RGSB** METAL BRACKET
- **RGSE** EUROPEAN BASE

CIRCUIT[1]

- **A** OFF-NONE-ON SINGLE POLE
- **B** ON-NONE-ON SINGLE POLE
- **C** OFF-NONE-ON DOUBLE POLE
- **D** ON-NONE-ON DOUBLE POLE
- **E** POLE 1 ON-NONE-ON POLE 2 OFF-NONE-ON
- **F** POLE 1 ON-NONE-OFF POLE 2 OFF-NONE-ON

RATING[2]

- **20** 15A 250VAC 20A 125VAC 3/4HP 125-250VAC
- **21** 15A 250 VAC 20A 125VAC
- **57** 10A 250VAC 3/4HP 15A 125VAC 3/4HP 6A 277VAC 3/4HP
- **70** 15A 250VAC 20A 125VAC 3/4HP 125-250VAC 16(6)A 250VAC T85
- **71** 15A 250VAC 20A 125VAC 16(6)A 250VAC T85

TERMINATION

- **0** SOLDER LUG
- **1** .250TAB (QC)
- **5** WIRE LEAD

ACTUATOR STYLE

- **P** PADDLE
- **R** ROCKER

ACTUATOR COLOR[3]

- **B** BLACK
- **W** WHITE

BASE COLOR[3]

- **B** BLACK
- **W** WHITE

ROCKER FACE IMPRINTED LEGEND[4]

- **0** NO LEGEND
- **A** OFF-ON (VERTICAL)
- **B** OFF-ON (HORIZONTAL)
- **D** O-I (HORIZONTAL)
- **E** O-I (VERTICAL)
- **F** ON-OFF (VERTICAL)
- **G** ON-OFF (HORIZONTAL)

NOTES:
Shading indicates standard configurations.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 Circuits E and F available with Rating Codes 20, 21 and 57 only.
2 Additional ratings are available. Consult factory.
3 Custom colors are available. Consult factory.
4 White is standard with dark actuators; black is standard with light actuators.