

# BC635, BC637, BC639, BC639-16

## High Current Transistors

NPN Silicon



ON Semiconductor



<http://onsemi.com>

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$		Vdc
	BC635	45	
	BC637 BC639	60 80	
Collector-Base Voltage	$V_{CBO}$		Vdc
	BC635	45	
	BC637 BC639	60 80	
Emitter-Base Voltage	$V_{EBO}$	5.0	Vdc
Collector Current — Continuous	$I_C$	1.0	Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	625	mW
		5.0	mW/°C
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	800	mW
		12	mW/°C
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +150	°C

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W



TO-92 (TO-226AA)  
CASE 29  
STYLE 14

### ORDERING INFORMATION

Device	Package	Shipping
BC635RL1	TO-92	2000/Tape & Reel
BC635ZL1	TO-92	2000/Ammo Pack
BC637	TO-92	5000 Units/Box
BC639	TO-92	5000 Units/Box
BC639RL1	TO-92	2000/Tape & Reel
BC639ZL1	TO-92	2000/Ammo Pack
BC639-16ZL1	TO-92	2000/Ammo Pack

# BC635, BC637, BC639, BC639-16

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
<b>OFF CHARACTERISTICS</b>						
Collector–Emitter Breakdown Voltage (1) (I <sub>C</sub> = 10 μAdc, I <sub>B</sub> = 0)	BC635 BC637 BC639	V <sub>(BR)CEO</sub>	45 60 80	— — —	— — —	Vdc
Collector–Emitter Zero–Gate Breakdown Voltage (1) (I <sub>C</sub> = 100 μAdc, I <sub>B</sub> = 0)	BC639–16	V <sub>(BR)CES</sub>	120	—	—	Vdc
Collector–Base Breakdown Voltage (I <sub>C</sub> = 100 μAdc, I <sub>E</sub> = 0)	BC635 BC637 BC639	V <sub>(BR)CBO</sub>	45 60 80	— — —	— — —	Vdc
Emitter–Base Breakdown Voltage (I <sub>E</sub> = 10 μAdc, I <sub>C</sub> = 0)		V <sub>(BR)EBO</sub>	5.0	—	—	Vdc
Collector Cutoff Current (V <sub>CB</sub> = 30 Vdc, I <sub>E</sub> = 0) (V <sub>CB</sub> = 30 Vdc, I <sub>E</sub> = 0, T <sub>A</sub> = 125°C)		I <sub>CBO</sub>	— —	— —	100 10	nAdc μAdc
<b>ON CHARACTERISTICS (1)</b>						
DC Current Gain (I <sub>C</sub> = 5.0 mAdc, V <sub>CE</sub> = 2.0 Vdc) (I <sub>C</sub> = 150 mAdc, V <sub>CE</sub> = 2.0 Vdc)	BC635 BC637 BC639 BC639–16ZLT1	h <sub>FE</sub>	25 40 40 40 100 25	— — — — — —	— 250 160 160 250 —	—
(I <sub>C</sub> = 500 mA, V <sub>CE</sub> = 2.0 V)						
Collector–Emitter Saturation Voltage (I <sub>C</sub> = 500 mAdc, I <sub>B</sub> = 50 mAdc)		V <sub>CE(sat)</sub>	—	—	0.5	Vdc
Base–Emitter On Voltage (I <sub>C</sub> = 500 mAdc, V <sub>CE</sub> = 2.0 Vdc)		V <sub>BE(on)</sub>	—	—	1.0	Vdc
<b>DYNAMIC CHARACTERISTICS</b>						
Current–Gain — Bandwidth Product (I <sub>C</sub> = 50 mAdc, V <sub>CE</sub> = 2.0 Vdc, f = 100 MHz)		f <sub>T</sub>	—	200	—	MHz
Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)		C <sub>ob</sub>	—	7.0	—	pF
Input Capacitance (V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, f = 1.0 MHz)		C <sub>ib</sub>	—	50	—	pF

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle 2.0%.

# BC635, BC637, BC639, BC639-16

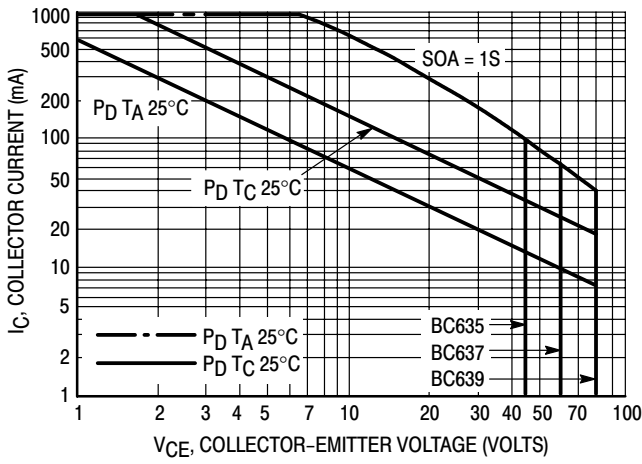


Figure 1. Active Region Safe Operating Area

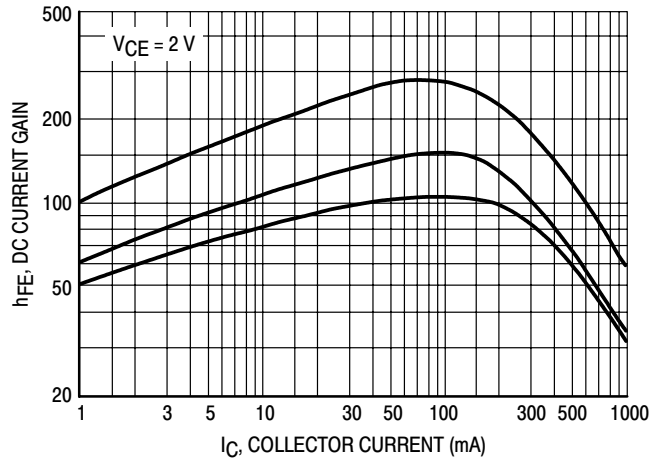


Figure 2. DC Current Gain

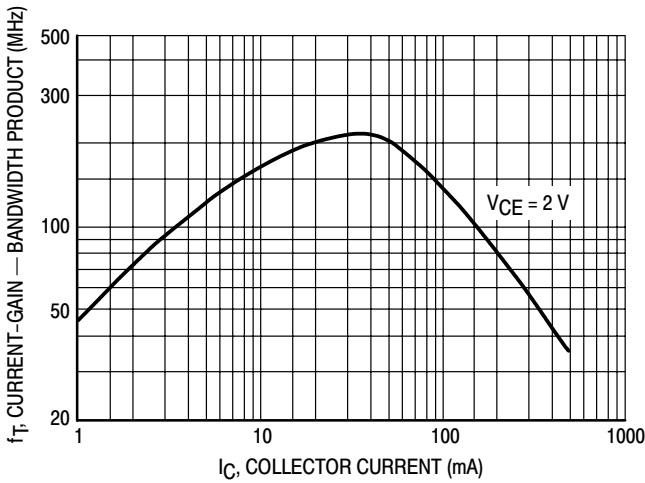


Figure 3. Current-Gain — Bandwidth Product

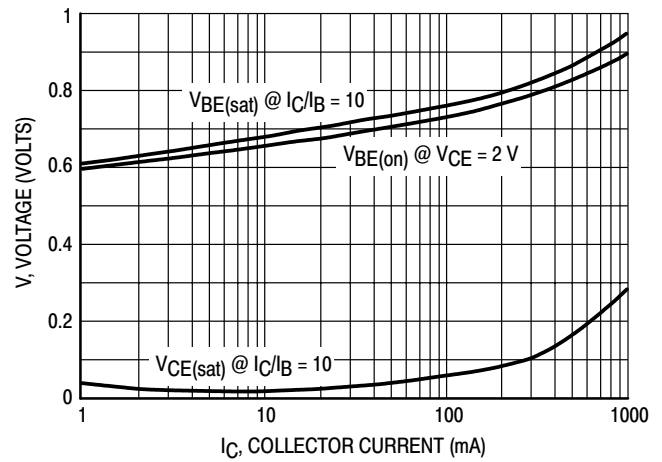


Figure 4. "Saturation" and "On" Voltages



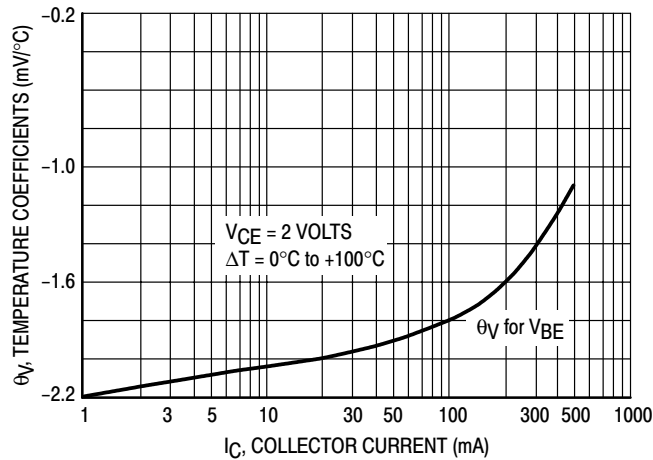


Figure 5. Temperature Coefficients

# BC635, BC637, BC639, BC639-16

## PACKAGE DIMENSIONS

TO-92  
(TO-226)  
CASE 29-11  
ISSUE AL

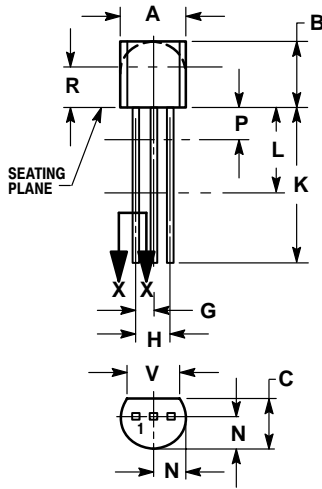


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	---	12.70	---
L	0.250	---	6.35	---
N	0.080	0.105	2.04	2.66
P	---	0.100	---	2.54
R	0.115	---	2.93	---
V	0.135	---	3.43	---

STYLE 14:

1. EMITTER
2. COLLECTOR
3. BASE

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

### PUBLICATION ORDERING INFORMATION

**Literature Fulfillment:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.