

DEC 9 1985

INC



International Components Corporation
105 Maxess Road, Melville, N.Y. 11747
(516) 293-1500
Cable: INTECOMPCO MELV
Telex: 221576 ICC NY

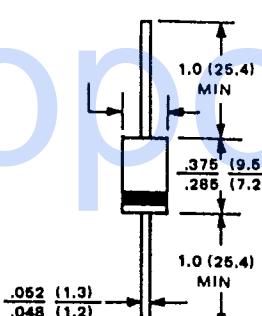
1N5400GPP THRU 1N5408GPP

DI

3 AMP. GLASS PASSIVATED RECTIFIER

 <p>FEATURES</p> <ul style="list-style-type: none"> • Low cost • Diffused junction • Low leakage • Low forward voltage drop • High current capability and high reliability • Easily cleaned with Freon, alcohol, Chlorothene and similar solvents • The plastic material carries U/L recognition 94V-O <p>MECHANICAL DATA</p> <p>Case: JEDEC DO-201AD, molded Plastic Terminals: Plated axial leads, solderable per MIL-STD-202 Method 208 Polarity: Band denotes cathode Weight: 0.04 ounce, 1.1 grams Mounting position: Any</p>	VOLTAGE RANGE 50 to 1000 Volts
	CURRENT 3.0 Ampere

DO-201AD



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz. resistive or inductive load.
 For capacitive load, derate current by 20%.

DI-11

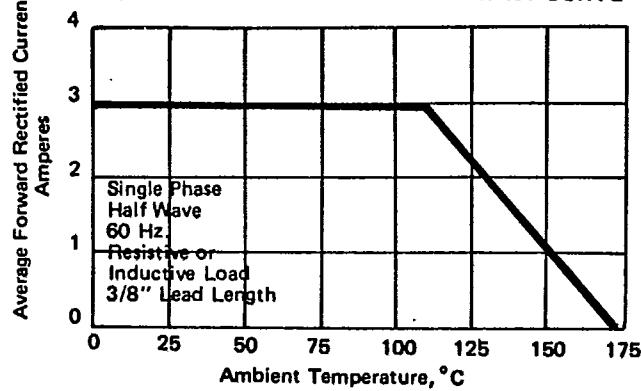
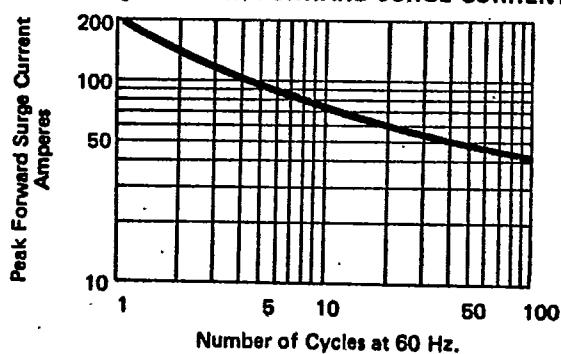
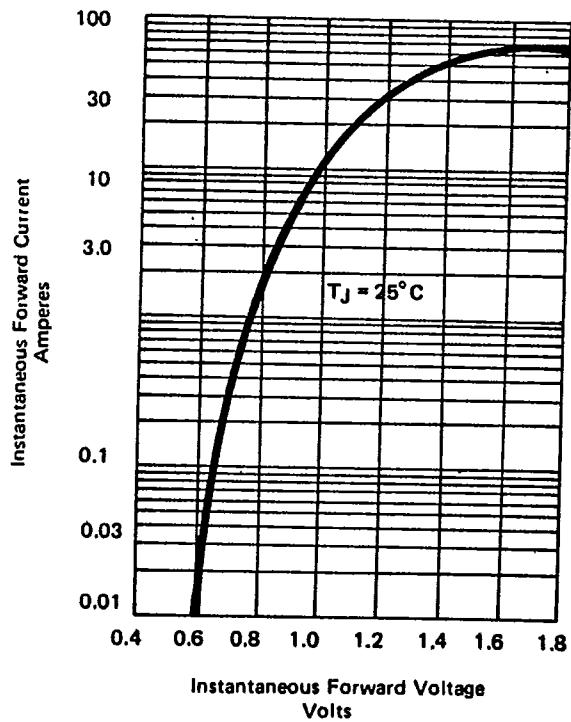
	1N5400 GPP	1N5401 GPP	1N5402 GPP	1N5403 GPP	1N5404 GPP	1N5405 GPP	1N5406 GPP	1N5407 GPP	1N5408 GPP	UNITS
*Maximum recurrent Peak Reverse Voltage	60	100	200	300	400	500	600	800	1000	V
*Maximum RMS Voltage	35	70	140	210	280	350	420	560	700	V
*Maximum DC Blocking Voltage	50	100	200	300	400	500	600	800	1000	V
*Maximum Average Forward Rectified Current 3/8" Lead Length at TA = 105°C							3.0			A
*Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)							200			A
*Maximum Forward Voltage at 3.0A DC							1.0			V
*Maximum DC Reverse Current <input checked="" type="radio"/> TA = 25°C <input checked="" type="radio"/> TA = 75°C							10 100			µA µA
Typical Junction Capacitance (Note 1)							70			pF
Typical Thermal Resistance (Note 2)							18			°C/W
Operating Temperature Range							-65 to +170			°C
Storage Temperature Range							-65 to +175			°C

NOTES: 1. As measured on a Boonton Capacitance Bridge, Model 75A-S8 at 1.0 MHz and applied reverse voltage of 4.0V DC.
 2. Thermal Resistance Junction to Ambient.
 * JEDEC registered values.

NOTE: Special Silicon Rectifier are also available.



RATING AND CHARACTERISTIC CURVES
1N5400GPP THRU 1N5408GPP

Fig. 1 — FORWARD CURRENT DERATING CURVE**Fig. 2 — PEAK FORWARD SURGE CURRENT****Fig. 3 — TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS****Fig. 4.— TYPICAL JUNCTION CAPACITANCE**