

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 4Pounds max.

Unmating Force: 10Pounds max.

Durability: 1000 Cycles

Electrical

Current Rating: 0.5A max.

Dielectric Withstanding Voltage: 1500V


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color


Contact: Phosphor Bronze Shell: Stainless steel

Operating Temperature: $0^{\circ}C$ to $+70^{\circ}C$


JFM Series RJ45 1X1 R/A,T/U, T/H Type 1.02mm [.040"] Pitch 10/100/1000 Base-T



DRAWING

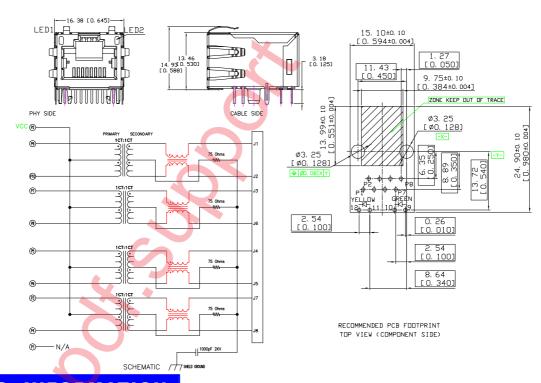

ORDERING INFORMATION

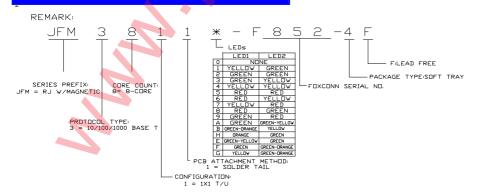

LED	LED 1	LED 2
	11 + +12	13 + + 14
JFM3811A-F852-4F	GREEN	YELLOW GREEN
JFM3811B-F852-4F	ORANGE GREEN	YELLOW
JFM3811H-F852-4F	-DH ORANGE	→→ GREEN
JFM3811E-F852-4F	YELLOW GREEN	-D- GREEN
JFM3811F-F852-4F	GREEN	ORANGE GREEN
JFM3811G—F852—4F	YELLOW	ORANGE GREEN
JFM3811*-F852-4F (*=1~9)	THE SPECIFIC COLOUR REFERS TO PAGE 5/8	THE SPECIFIC COLOUR REFERS TO PAGE 5/5