


**DESCRIPTION**

These Microsemi 15 kW Transient Voltage Suppressors (TVSs) are designed for applications requiring protection of voltage-sensitive electronic devices that may be damaged by harsh or severe voltage transients including lightning per IEC61000-4-5 and class levels with various source impedances described herein. This series is available in 17 to 280 volt standoff voltages ( $V_{WM}$ ) in both unidirectional and bi-directional offered in two different package designs for axial and radial configurations. Microsemi also offers numerous other TVS products to meet higher or lower power demands and special applications

**APPEARANCE**

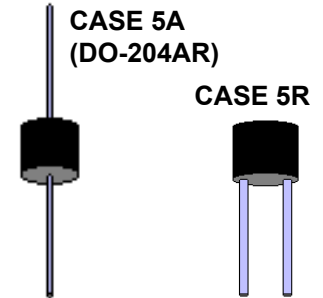

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

**FEATURES**

- Available in both Unidirectional and Bidirectional construction (Bidirectional with C or CA suffix)
- Available in both axial-leaded and radial packages (include R prefix in part number for radial package option shown in figure as "case 5R," ie . R15KP17A, R15KP90CA, R15KP280, etc.)
- Selections for 17 to 280 volt standoff voltages ( $V_{WM}$ )
- Suppresses transients up to 15 kW @ 10/1000  $\mu$ s and 100 kW @ 8/20  $\mu$ s (see Figure 1)
- Fast response
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers.
- Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B

**APPLICATIONS / BENEFITS**

- Protection from switching transients and induced RF
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4
- Secondary lightning protection per IEC61000-4-5 with 42 Ohms source impedance:
  - Class 1,2,3,4: 15KP17A - 15KP280A or CA
  - Class 5: 15KP17A - 15KP280A or CA (short distance)
  - Class 5: 15KP17A - 15KP110A or CA (long distance)
- Secondary lightning protection per IEC61000-4-5 with 12 Ohms source impedance:
  - Class 1 & 2: 15KP17A to 15KP280A or CA
  - Class 3: 15KP17A to 15KP240A or CA
  - Class 4: 15KP17A to 15KP120A or CA
- Secondary lightning protection per IEC61000-4-5 with 2 Ohms source impedance:
  - Class 2: 15KP17A to 15KP220A or CA
  - Class 3: 15KP17A to 15KP110A or CA
  - Class 4: 15KP17A to 15KP54A or CA

**MAXIMUM RATINGS**

- Peak Pulse Power dissipation at 25°C: 15,000 watts at 10/1000  $\mu$ s (also see Figures 1 and 2)
- Impulse repetition rate (duty factor): 0.05%
- $t_{clamping}$  (0 volts to  $V_{(BR)}$  min.): < 100 ps theoretical for unidirectional and < 5 ns for bidirectional
- Operating and Storage temperature: -65°C to +150°C
- Thermal resistance: 20°C/W junction to lead, or 80°C/W junction to ambient when mounted on FR4 PC board with 4 mm<sup>2</sup> copper pads (1oz) and track width 1 mm, length 25 mm
- Steady-State Power dissipation: 6 watts at  $T_L = 30^\circ\text{C}$ , or 1.56 watts at  $T_A = 25^\circ\text{C}$  when mounted on FR4 PC board described for thermal resistance
- Forward Surge: 200 Amps 8.3 ms half-sine wave
- Solder temperatures: 260°C for 10 s (maximum)

**MECHANICAL AND PACKAGING**

- CASE: Void-free transfer molded thermosetting epoxy body meeting UL94V-0
- FINISH: Tin-Lead plated readily solderable per MIL-STD-750, method 2026
- MARKING: Body marked with part number
- POLARITY: Band denotes cathode. Bidirectional not marked for polarity
- WEIGHT: 1.7 grams.
- TAPE & REEL option: Standard per EIA-296 for axial package (add "TR" suffix to part number)
- See package dimension on last page

**ELECTRICAL CHARACTERISTICS**

MICROSEMI PART NUMBER	REVERSE STAND-OFF VOLTAGE	BREAKDOWN VOLTAGE		MAXIMUM CLAMPING VOLTAGE	MAXIMUM STANDBY CURRENT	MAXIMUM PEAK PULSE CURRENT	MAXIMUM VOLTAGE TEMPERATURE VARIATION
	$V_{WM}$ (Note 1)	@		$V_C @ I_{PP}$	$I_D @ V_{WM}$	$I_{PP}$ (FIG. 2)	$\alpha_{V(BR)}$
	VOLTS	$V_{(BR)}$ VOLTS	$I_{(BR)}$ mA	VOLTS	$\mu A$	A	mV/°C
15KP17	17	18.9 – 23.1	50	32.3	5000	464	19
15KP17A	17	18.9 – 20.9	50	29.3	5000	512	17
15KP18	18	20.0 – 24.4	50	34.2	5000	439	20
15KP18A	18	20.0 – 22.1	50	30.9	5000	485	18
15KP20	20	22.2 – 27.1	20	37.9	1500	396	24
15KP20A	20	22.2 – 24.5	20	34.3	1500	437	21
15KP22	22	24.4 – 29.8	10	41.1	500	365	27
15KP22A	22	24.4 – 26.9	10	37.1	500	404	24
15KP24	24	26.7 – 32.6	5	45.0	150	333	30
15KP24A	24	26.7 – 29.5	5	40.7	150	369	27
15KP26	26	28.9 – 35.3	5	48.7	50	308	32
15KP26A	26	28.9 – 31.9	5	44.0	50	341	29
15KP28	28	31.1 – 38.0	5	52.4	25	286	35
15KP28A	28	31.1 – 34.4	5	47.5	25	316	31
15KP30	30	33.3 – 40.7	5	56.2	15	267	27
15KP30A	30	33.3 – 36.8	5	50.7	15	296	34
15KP33	33	36.7 – 44.9	5	60.6	10	248	42
15KP33A	33	36.7 – 40.6	5	54.8	10	274	38
15KP36	36	40.0 – 48.9	5	66.0	10	227	46
15KP36A	36	40.0 – 44.2	5	59.7	10	251	41
15KP40	40	44.4 – 54.3	5	72.8	10	206	51
15KP40A	40	44.4 – 49.1	5	65.8	10	228	46
15KP43	43	47.8 – 58.4	5	77.1	10	195	55
15KP43A	43	47.8 – 52.8	5	69.7	10	215	50
15KP45	45	50.0 – 61.1	5	80.7	10	186	57
15KP45A	45	50.0 – 55.3	5	73.0	10	205	52
15KP48	48	53.3 – 65.1	5	85.9	10	175	62
15KP48A	48	53.3 – 58.9	5	77.7	10	193	56
15KP51	51	56.7 – 69.3	5	91.5	10	164	66
15KP51A	51	56.7 – 62.7	5	82.8	10	181	60
15KP54	54	60.0 – 73.3	5	96.8	10	155	70
15KP54A	54	60.0 – 66.3	5	87.5	10	171	63
15KP58	58	64.4 – 78.7	5	104.0	10	144	76
15KP58A	58	64.4 – 71.2	5	94.0	10	160	68
15KP60	60	66.7 – 81.5	5	107.0	10	140	78
15KP60A	60	66.7 – 73.7	5	97.3	10	154	71
15KP64	64	71.1 – 86.9	5	115	10	130	84
15KP64A	64	71.1 – 78.6	5	104	10	144	76
15KP70	70	77.8 – 95.1	5	126	10	119	92
15KP70A	70	77.8 – 86.0	5	114	10	132	83
15KP75	75	83.3 – 102.0	5	135	10	111	100
15KP75A	75	83.3 – 92.1	5	122	10	123	89
15KP78	78	86.7 – 106.0	5	140	10	107	104
15KP78A	78	86.7 – 95.8	5	126	10	119	93
15KP85	85	94.4 – 115	5	152	10	99	113
15KP85A	85	94.4 – 104	5	137	10	109	102
15KP90	90	100 – 122	5	160	10	94	120
15KP90A	90	100 – 111	5	146	10	103	109
15KP100	100	111 – 136	5	179	10	84	134
15KP100A	100	111 – 123	5	162	10	93	121
15KP110	110	122 – 149	5	196	10	77	147
15KP110A	110	122 – 135	5	178	10	84	133
15KP120	120	133 – 163	5	214	10	70	161
15KP120A	120	133 – 147	5	193	10	78	145
15KP130	130	144 – 176	5	231	10	65	174
15KP130A	130	144 – 159	5	209	10	72	157
15KP150	150	167 – 204	5	268	10	56	202
15KP150A	150	167 – 185	5	243	10	62	183
15KP160	160	178 – 218	5	287	10	52	216
15KP160A	160	178 – 197	5	259	10	58	195


MICROSEMI PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$ (Note 1) VOLTS	BREAKDOWN VOLTAGE @		MAXIMUM CLAMPING VOLTAGE $V_C$ @ $I_{PP}$ VOLTS	MAXIMUM STANDBY CURRENT $I_D$ @ $V_{WM}$ $\mu A$	MAXIMUM PEAK PULSE CURRENT $I_{PP}$ (FIG. 2) A	MAXIMUM VOLTAGE TEMPERATURE VARIATION $\alpha_{V(BR)}$ mV/°C
		$V_{(BR)}$ VOLTS	$I_{(BR)}$ mA				
15KP170	170	189 – 231	5	304	10	49	229
15KP170A	170	189 – 209	5	275	10	55	207
15KP180	180	200 – 244	5	321	10	47	242
15KP180A	180	200 – 221	5	291	10	52	219
15KP200	200	222 – 271	5	356	10	42	269
15KP200A	200	222 – 245	5	322	10	47	243
15KP220	220	245 – 299	5	393	10	38	297
15KP220A	220	245 – 271	5	356	10	42	269
15KP240	240	267 – 326	5	428	10	35	324
15KP240A	240	267 – 295	5	388	10	39	293
15KP260	260	289 – 353	5	464	10	32	352
15KP260A	260	289 – 319	5	419	10	36	317
15KP280	280	311 – 380	5	500	10	30	378
15KP280A	280	311 – 344	5	452	10	33	342

**NOTE 1:** Transient Voltage Suppressors are normally selected with reverse “Standoff Voltage”  $V_{WM}$  which should be equal to or greater than the dc or continuous peak operating voltage level.


**NOTE 2:** For bidirectional construction, indicate a C or CA suffix after the part number.

**SYMBOLS & DEFINITIONS**


Symbol	Definition	Symbol	Definition
$V_{WM}$	Working Peak (Standoff) Voltage	$I_{PP}$	Peak Pulse Current
$P_{PP}$	Peak Pulse Power	$V_C$	Clamping Voltage
$V_{(BR)}$	Breakdown Voltage	$I_{(BR)}$	Breakdown Current for $V_{(BR)}$
$I_D$	Standby Current		

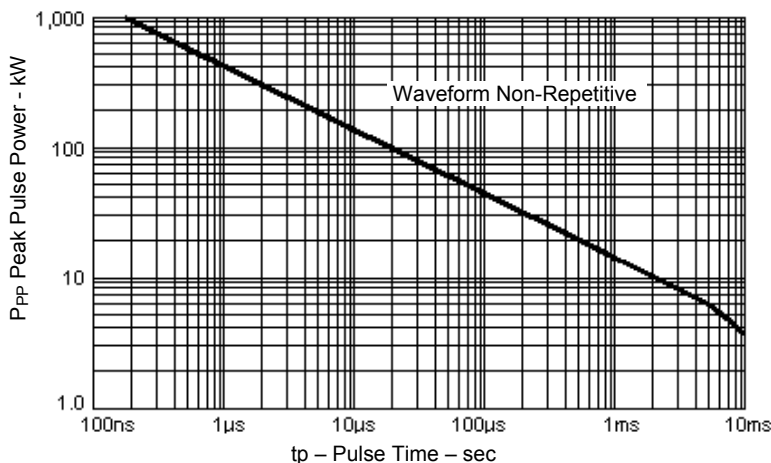

**FIGURE 1**  
Peak Pulse Power vs. Pulse Time to 50% of Exponentially Decaying Pulse

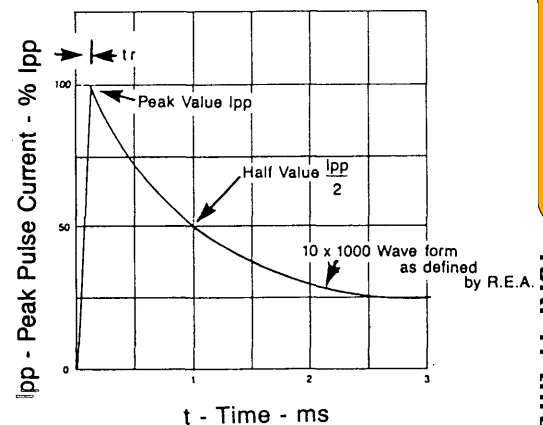

Test waveform parameters:  
 $t_r=10 \mu s$ ,  $t_p=1000 \mu s$   
**FIGURE 2**  
Pulse Waveform

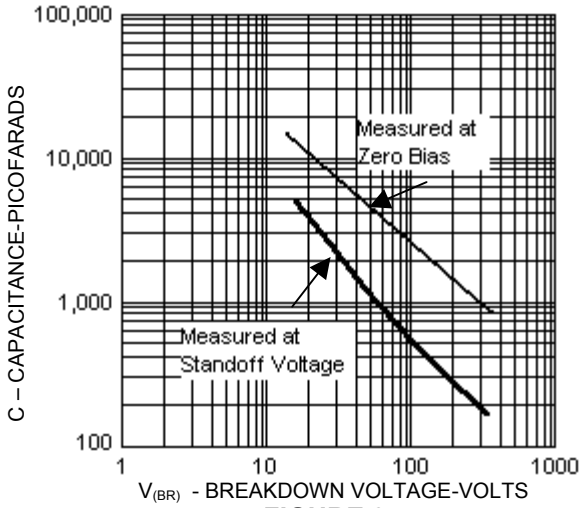

**FIGURE 3**

Typical Capacitance vs. Breakdown Voltage

**NOTE:** For Bidirectional Construction, indicate a C or CA suffix after part number. Capacitance will be one-half that shown in Figure 3.

