

TENTATIVE DATA
(TLP296G)

TELECOMMUNICATION

DATA ACQUISITION

MEASUREMENT INSTRUMENTATION

The TOSHIBA TLP296G consists of gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in a 8 lead DIP package.


The TLP296G is a bi-directional switch which can replace mechanical relay in many applications.

- 8 Pin DIP, 2 Channel Type (2 Form A)
- Peak Off-State Voltage : 400V (MIN.)
- Trigger LED Current : 5mA (MAX.)
- On-State Current : 100mA (MAX.)
- On-State Resistance : 30Ω (MAX.)
- Isolation Voltage : 2500V_{rms} (MIN.)
- Trigger LED Current (Ta = 25°C)

CLASSIFICATION	TRIGGER LED CURRENT (mA)		MARKING OF CLASSIFICATION
	@I _{ON} = 100mA		
	MIN.	MAX.	
(IFT2)	—	2	T2
Standard	—	5	T2, blank


* Ex. Rank IFT2 : TLP296G (IFT2)

Unit in mm

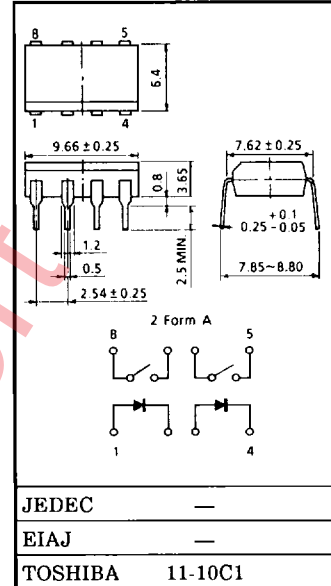

Weight : 0.56g

PIN CONFIGURATION (Top view)



- 1, 3 : ANODE
- 2, 4 : CATHODE
- 5 : DRAIN D1
- 6 : DRAIN D2
- 7 : DRAIN D3
- 8 : DRAIN D4

(TLP296G)

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT	
LED	Forward Current	I _F	50	mA	
	Forward Current Derating (Ta ≥ 25°C)	ΔI _F /°C	-0.5	mA/°C	
	Peak Forward Current (100μs pulse, 100pps)	I _{FP}	1	A	
	Reverse Voltage	V _R	5	V	
	Junction Temperature	T _j	125	°C	
DETECTOR	Off-State Output Terminal Voltage	V _{OFF}	400	V	
	On-State Current	Both Channel Note 1	I _{ON}	100	mA
		One Channel		120	
	On-State Current Derating (Ta ≥ 25°C)	Both Channel Note 1	ΔI _{ON} /°C	-1.0	mA/°C
		One Channel		-1.2	
Junction Temperature	T _j	125	°C		
Storage Temperature Range		T _{stg}	-55~100	°C	
Operating Temperature Range		T _{opr}	-20~85	°C	
Lead Soldering Temperature (10sec.)		T _{sol}	260	°C	
Isolation Voltage (AC, Imin., R.H. ≤ 60%) Note 2		BVS	2500	V _{rms}	

Note 1 : Two channels operating simultaneously.

Note 2 : Device considered a two-terminal device : Pins 1, 2, 3 and 4 shorted together and Pins 5, 6, 7 and 8 shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{DD}	—	—	320	V
Forward Current	I _F	7.5	15	25	mA
On-State Current	I _{ON}	—	—	100	mA
Operating Temperature	T _{opr}	-20	—	80	°C

(TLP296G)

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R = 5\text{V}$	—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	Off-State Current	I_{OFF}	$V_{OFF} = 400\text{V}$	—	—	1	μA
	Capacitance	C_{OFF}	$V = 0, f = 1\text{MHz}$	—	—	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	I_{FT}	$I_{ON} = 100\text{mA}$	—	2	5	mA
On-State Resistance	R_{ON}	$I_{ON} = 100\text{mA}, I_F = 10\text{mA}$	—	20	30	Ω

ISOLATION CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance Input to Output	C_S	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S = 500\text{V}, \text{R.H.} \leq 60\%$	5×10^{10}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	2500	—	—	V_{rms}
		AC, 1 second (in oil)	—	5000	—	
		DC, 1 minute (in oil)	—	5000	—	Vdc

SWITCHING CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Turn-on Time	t_{ON}	$R_L = 200\Omega$ (Note 1)	—	—	4	ms
Turn-off Time	t_{OFF}	$V_{DD} = 20\text{V}, I_F = 10\text{mA}$	—	—	4	

Note 1 : SWITCHING TIME TEST CIRCUIT

