

SENSITRON
SEMICONDUCTOR

KBPC15, 25, 35/W SERIES
15, 25, 35A HIGH CURRENT BRIDGE RECTIFIER

Data sheet 1298 Rev.—


Features

- Diffused Junction
- Low Reverse Leakage Current
- Low Power Loss, High Efficiency
- Electrically Isolated Metal Case for Maximum Heat Dissipation
- Case to Terminal Isolation Voltage 2500V

Mechanical Data

- Case: Metal Case with Electrically Isolated Epoxy
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Symbols Marked on Case
- Mounting: Through Hole for #8 Screw
- Weight: KBPC 31.6 grams (approx.)
KBPC-W 28.5 grams (approx.)
- Marking: Type Number

"W" Suffix Designates Wire Leads
No Suffix Designates Faston Terminals

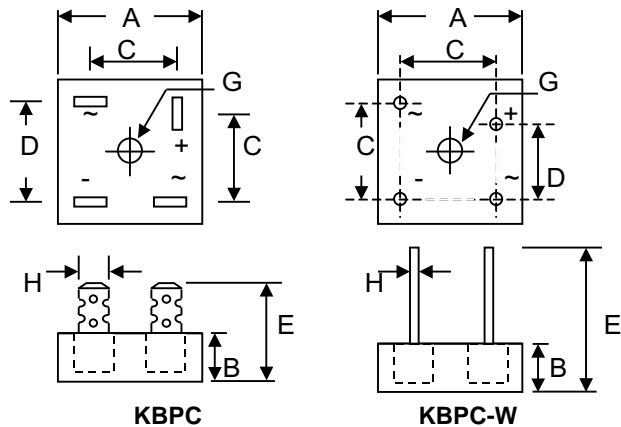

Dim	KBPC				KBPC-W							
	Min	Max	Min	Max	Min	Max	Min	Max				
A	28.40	28.7	1.118	1.130	28.40	28.7	1.118	1.130				
B	10.97	11.23	0.432	0.442	10.97	11.23	0.432	0.442				
C	15.70	16.70	0.618	0.657	17.10	19.10	0.673	0.752				
D	17.50	18.50	0.689	0.728	10.90	11.90	0.429	0.469				
E	22.86	25.40	0.90	1.00	30.50	—	1.201	—				
G	Hole for #8 screw, 4.90mm(0.193inch)ØNormina											
H	6.35 Typical		0.25 Typical		0.97Ø		1.07Ø		0.038Ø		0.042Ø	
	In mm		In inch		In mm		In mm		In inch			

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristics	Symbol	-00/W	-01/W	-02/W	-04/W	-06/W	-08/W	-10/W	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	35	70	140	280	420	560	700	V
Average Rectifier Output Current @T _C = 60°C	KBPC15 KBPC25 KBPC35 I _O				15 25 35				A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave Superimposed on rated load (JEDEC Method)	KBPC15 KBPC25 KBPC35 I _{FSM}				300 400 400				A
Forward Voltage Drop (per element)	KBPC15 @I _F = 7.5A KBPC25 @I _F = 12.5A KBPC35 @I _F = 17.5A V _{FM}				1.2				V
Peak Reverse Current At Rated DC Blocking Voltage	@T _C = 25°C @T _C = 125°C I _{RM}				10 1.0				µA mA
I ² t Rating for Fusing (t < 8.3ms) (Note 1)	KBPC15 KBPC25 KBPC35 I ² t				373 373 664				A ² s

Data sheet 1298 Rev.—


Maximum Ratings and Electrical Characteristics @ $T_A=25^{\circ}\text{C}$ unless otherwise specified

Typical Junction Capacitance (per element) (Note 2)	C_j	300	pF
Typical Thermal Resistance Junction to Case (per element) (Note 3)	$R_{\theta JC}$	6.3 3.8 2.7	K/W
RMS Isolation Voltage from Case to Lead	V_{ISO}	2500	V
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150	$^{\circ}\text{C}$


* Glass passivated forms are available upon request.

- Note: 1. Measured at non-repetitive, for $t > 1\text{ms}$ and $< 8.3\text{ms}$.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
3. Thermal resistance junction to case mounted on heatsink.


Data sheet 1298 Rev.—

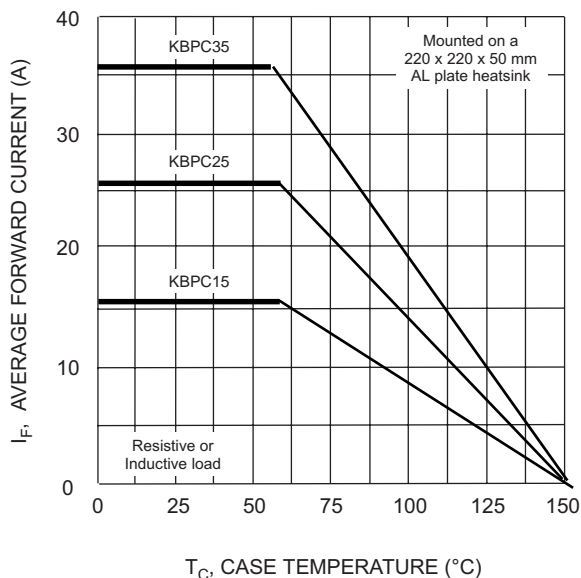


T_C , CASE TEMPERATURE ($^{\circ}C$)
Fig. 1 Forward Current Derating Curve

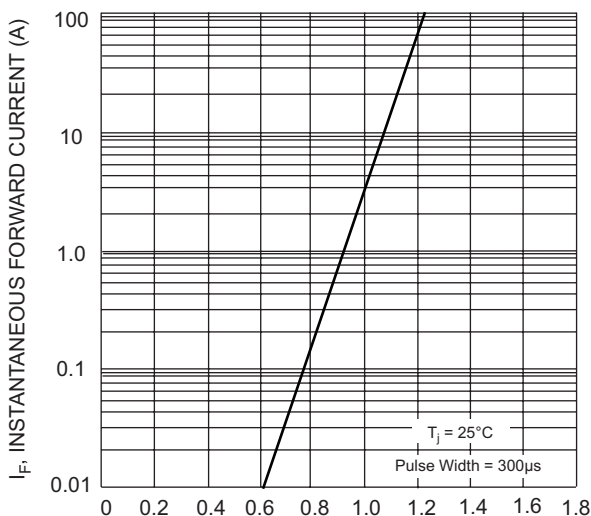


V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics (per element)

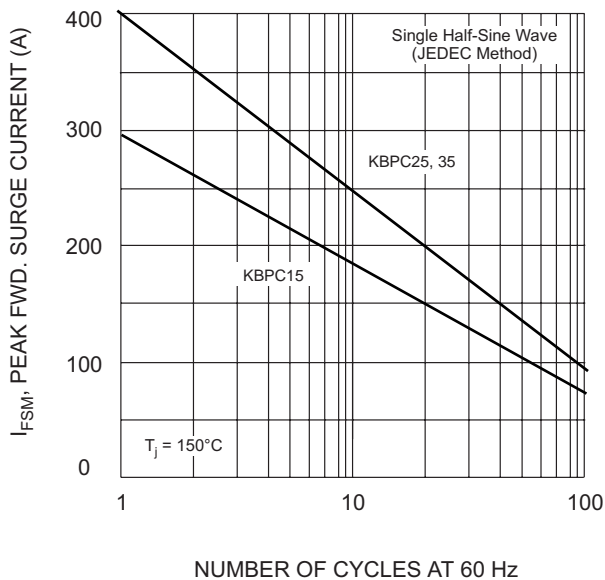

NUMBER OF CYCLES AT 60 Hz
Fig. 3 Max Non-Repetitive Surge Current

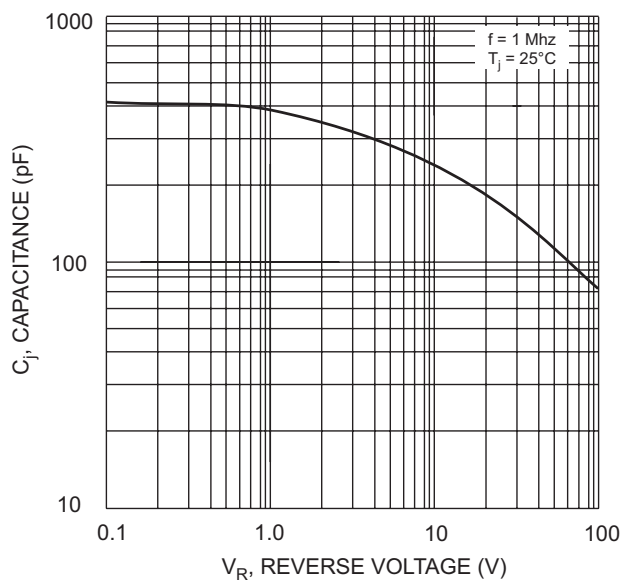

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Junction Capacitance (per element)

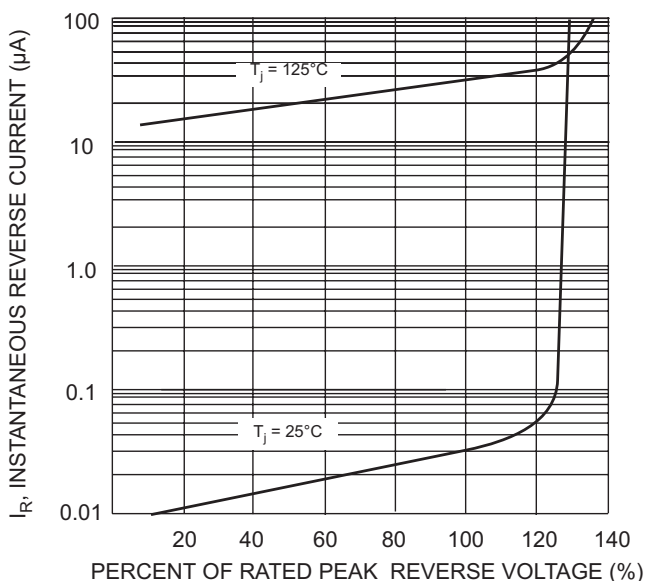

PERCENT OF RATED PEAK REVERSE VOLTAGE (%)
Fig. 5 Typical Reverse Characteristics (per element)