



TO-3

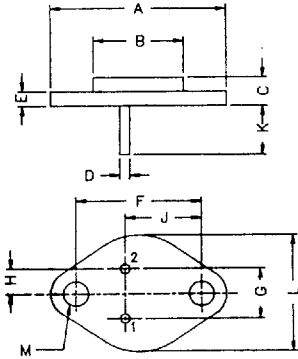

DIM	MIN	MAX
A	—	39,37
B	—	22,22
C	6,35	8,50
D	0,96	1,09
E	—	1,77
F	29,90	30,4
G	10,69	11,18
H	5,20	5,72
J	16,64	17,15
K	11,15	12,25
L	—	26,67
M	3,84	4,19

ALL DIMENSIONS ARE IN M.M.



PIN CONFIGURATION
 1. BASE
 2. EMITTER
 3. COLLECTOR

TO-3 Power Package Transistors (NPN)

Type No.	Maximum Ratings					Electrical Characteristics (Ta=25°C, Unless Otherwise Specified)																
	V _{CB0} (V) Min	V _{CEO} (V) Min	V _{EBO} (V) Min	P _D (W) @ Tc=25°C	I _C (A)	I _{CB0} (μA) Max	V _{CB} @ (V)	I _{CES} (μA) Max	V _{CE} @ (V)	h _{FE} @ Min	h _{FE} @ Max	I _C & V _{CE} (A) (V)	V _{CE(SAT)} (V) & Max	V _{CE(SAT)} (V) & Min	V _{BE(SAT)} (V) Max	I _C @ (A)	C _{ob} (pF) Max	f _t (MHz) Min	f _t (MHz) Typ	f _t (MHz) Max	I _C (mA)	
2N3055	100	60	7	117	15			*1000	100	20	70	4 4	1.1			4		2.5				500
2N3055HV	100	100	7	90	15			*1000	100	20	100	4 4	1.1			4		2.5				500
2N3055S	100	60	7	90	15			*1000	100	20	100	4 4	1.1			4		2.5				500
2N3773	160	140	7	150	16	2000	140			15	60	8 4	1.4			8						
2N4347	140	120	7	100	5			*2000	125	15	60	2 4	1			2						500
2N6253	50	45	7	115	15			*2000	55	20	70	3 4	1.0			3						
2N6257	50	40	5	150	20	4000	50			15	75	8 4	1.5			8		200				1000
2N6371	50	40	7	117	15					15	60	8 4	1.5			8		800				1000
2N6371HV	100	100	5	90	15			*2000	45	15	60	8 4	1.5			8	330	2.5				500
2SC1308	#1500	400	6	50	5			1000	1500	3		4 5	5.0		1.5	4					3	100
2SC1413	1200	500	6	50	5	\$1000	1200						10		2.0	5						
2SC1413A	1500	500	6	50	5	\$1000	1500						10		2.0	5						
2SC1454	300	300	6	50	4	1000	300			20		1 5	1.5		1.4	2.5						
2SC1875	150	500	6	50	3.5	20	1000			5	35	0.5 10	10	0.8	1.2	2.5						
2SC1922	1500	800	6	50	2.5	10	600						5		1.5	2						

#NOTE: V_{CE(S)}
 *NOTE: I_{CEX}
 \$NOTE: I_{CBX}

■ 2383394 0000929 301 ■