


**Ultra High Precision Z-Foil Resistor with TCR of  $\pm 0.05$  ppm/°C, Tolerance of  $\pm 0.005$  % (50 ppm), Load Life Stability of  $\pm 0.005$  %, ESD Immunity up to 25 kV and Thermal EMF of 0.05  $\mu$ V/°C**



**INTRODUCTION**

The Bulk Metal® Foil resistor is based on a special concept where a proprietary bulk metal cold rolled foil is cemented to a ceramic substrate. It is then photoetched into a resistive pattern. Furthermore, it is laser adjusted to any desired value and tolerance. Because the metals used are not drawn, wound or mistreated in any way during manufacturing process, the Bulk Metal Foil resistor maintains all its design, physical and electrical characteristics while winding of wire or sputtering does not. Z foil resistors achieve maximum stability and near-zero TCR. These performance characteristics are built-in for every unit, and do not rely on screening or other artificial means for uniform performances.

The stability of a resistor depends primarily on its history of exposures to temperature. Stability is affected by:

1. Changes in the ambient temperature and heat from adjacent components (defined by the Temperature Coefficient of Resistance, or TCR)
2. Destabilizing thermal shock of suddenly-applied power (defined by the power coefficient, or PCR)
3. Long-term exposure to applied power (load-life stability)
4. Repetitive stresses from being switched on and off

In very high-precision resistors, these effects must be taken into account to achieve high stability with changes in load (Joule Effect) and ambient temperature.

Vishay's new Z-Foil technology provides an order of magnitude reduction in the Bulk Metal Foil element's sensitivity to temperature changes - both external and internal. This technology provides an absolute TCR of  $\pm 0.05$  ppm/°C typical (instrument range: 0 °C to +60 °C),  $\pm 0.2$  ppm/°C typical (military range: - 55 °C to + 125 °C, + 25 °C ref), and a PCR of 5 ppm at rated power.

In order to take full advantage of this TCR improvement, it is necessary to take into account the differences in the resistor's response to each of the above-mentioned effects. The Z series has been developed to successfully deal with these factors.

TABLE 1 - TYPICAL TCR AND MAX. SPREAD (- 55 °C to + 125 °C, + 25 °C ref.)		
VALUE	STANDARD TOLERANCE	TYPICAL TCR AND MAX. SPREAD (ppm/°C)
100 $\Omega$ to 600 K $\Omega$	$\pm 0.005$ %	$\pm 0.2 \pm 0.6$
80 $\Omega$ to < 100 $\Omega$	$\pm 0.005$ %	$\pm 0.2 \pm 0.8$
50 $\Omega$ to < 80 $\Omega$	$\pm 0.01$ %	$\pm 0.2 \pm 1.0$
25 $\Omega$ to < 50 $\Omega$	$\pm 0.01$ %	$\pm 0.2 \pm 1.3$
10 $\Omega$ to < 25 $\Omega$	$\pm 0.02$ %	$\pm 0.2 \pm 1.6$


\* Pb containing terminations are not RoHS compliant, exemptions may apply

**FEATURES**


- Temperature coefficient of resistance (TCR):
  - $\pm 0.05$  ppm/°C typical (0 °C to + 60 °C)
  - $\pm 0.2$  ppm/°C typical (- 55 °C to + 125 °C, + 25 °C ref.) (see table 1)
- Rated power: to 1 W at + 125 °C
- Resistance tolerance: to  $\pm 0.005$  % (50 ppm)
- Load life stability: to  $\pm 0.005$  % at 70 °C, 2000 h or to  $\pm 0.015$  % at 70°C, 10000 h (see table 4)
- Resistance range: 10  $\Omega$  to 600 k $\Omega$
- Vishay Foil Resistors are not restricted to standard values; specific "as required" values can be supplied at no extra cost or delivery (e.g. 1K2345 vs. 1K)
- Total accumulated change in resistance over life (EOL) < 0.05 % (or better with PMO)
- Electrostatic discharge up to 25 000 V
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: 0.010  $\mu$ V<sub>RMS</sub>/V of applied voltage (< - 40 dB)
- Thermal EMF: 0.05  $\mu$ V/°C typical
- Voltage coefficient: < 0.1 ppm/V
- Low inductance: < 0.08  $\mu$ H typical
- Thermal stabilization time < 1 s (nominal value achieved within 10 ppm of steady state value)
- Pattern design minimizing hot spots
- Terminal finish: lead (Pb)-free or tin/lead alloy
- Matched sets are available per request (TCR tracking: to 0.5 ppm/°C)
- Prototype quantities available in just 5 working days or sooner. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)
- Load life  $\Delta R$  maximum can be reduced significantly with our post manufacturing operations (PMO) see page 4 for details



**FIGURE 1 - TYPICAL RESISTANCE/TEMPERATURE CURVE (Z-FOIL)**

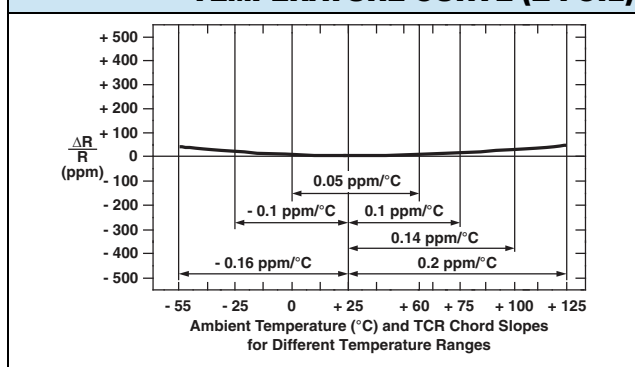

**FIGURE 2 - STANDARD IMPRINTING AND DIMENSIONS**

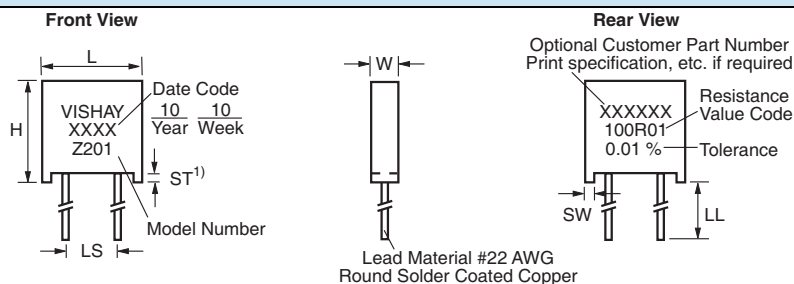

**Note**

1. The standoffs shall be so located as to give a lead clearance of 0.010" minimum between the resistor body and the printed circuit board when the standoffs are seated on the printed circuit board. This is to allow for proper cleaning of flux and other contaminants from the unit after all soldering processes.

**TABLE 2 - MODEL SELECTION**


MODEL NUMBER	RESISTANCE RANGE <sup>(2)</sup> (Ω)	MAXIMUM WORKING VOLTAGE	AMBIENT POWER RATING		AVERAGE WEIGHT (g)	DIMENSIONS	
			at + 70 °C	at + 125 °C		INCHES	mm
Z201 (Z201L) <sup>(1)</sup>	10R to 100K	300	0.6 W	0.3 W	0.6	W: 0.105 ± 0.010 L: 0.300 ± 0.010 H: 0.326 ± 0.010 ST: 0.010 min. SW: 0.035 ± 0.010 LL: 1.000 ± 0.125 LS: 0.150 ± 0.005	2.67 ± 0.25 7.62 ± 0.25 8.28 ± 0.25 0.254 min. 1.02 ± 0.13 25.4 ± 3.18 3.81 ± 0.13
Z204	10R to 200K	350	1.0 W	0.5 W	1.4	W: 0.160 max. L: 0.575 max. H: 0.413 max. ST: 0.035 ± 0.005 SW: 0.050 ± 0.005 LL: 1.000 ± 0.125 LS: 0.400 ± 0.020	4.06 max. 14.61 max. 10.49 max. 0.889 ± 0.13 1.27 ± 0.13 25.4 ± 3.18 10.16 ± 0.51
Z205	10R to 300K	350	1.5 W	0.75 W	1.9	W: 0.160 max. L: 0.820 max. H: 0.413 max. ST: 0.035 ± 0.005 SW: 0.050 ± 0.005 LL: 1.000 ± 0.125 LS: 0.650 ± 0.020	4.06 max. 20.83 max. 10.49 max. 0.889 ± 0.13 1.27 ± 0.13 25.4 ± 3.18 16.51 ± 0.51
Z206	10R to 600K	500	2.0 W up to 400K 1.0 W over 400K	1.0 W 0.5 W	4.0	W: 0.260 max. L: 1.200 max. H: 0.413 max. ST: 0.035 ± 0.005 SW: 0.050 ± 0.005 LL: 1.000 ± 0.125 LS: 0.900 ± 0.020	6.60 max. 30.48 max. 10.49 max. 0.889 ± 0.13 1.27 ± 0.13 25.4 ± 3.18 22.86 ± 0.51

**Note**


<sup>(1)</sup> 0.200" (5.08 mm) lead spacing available - specify Z201L for Z201.

<sup>(2)</sup> for non standard values please contact Application Engineering Department at [foil@vishaypg.com](mailto:foil@vishaypg.com)

**FIGURE 3 - POWER DERATING CURVE**

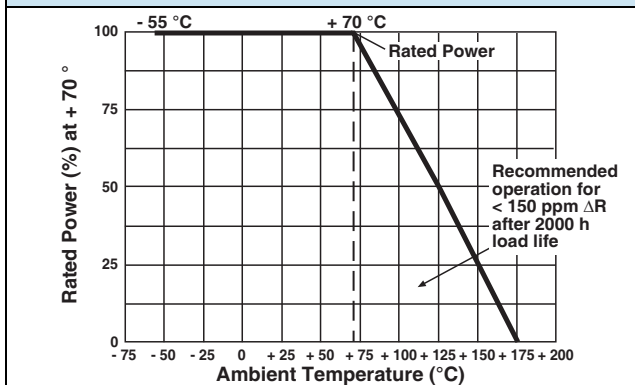

**FIGURE 4 - TRIMMING TO VALUES**  
(conceptual illustration)

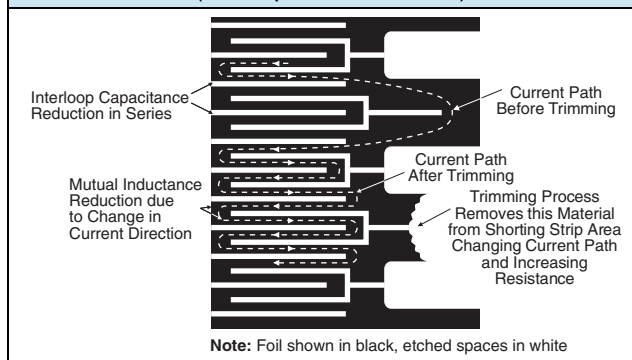


**TABLE 3 - ENVIRONMENTAL PERFORMANCE COMPARISON**

	MIL-PRF-55182 CHAR J	Z SERIES TYPICAL $\Delta R$	Z SERIES MAXIMUM $\Delta R$
<b>Test Group I</b>			
Thermal shock, 5 x (- 65 °C to + 150 °C)	± 0.2 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
Short time overload, 6.25 x rated power	± 0.2 %	± 0.003 % (30 ppm)	± 0.01 % (100 ppm)
<b>Test Group II</b>			
Resistance temperature characteristics	± 25 ppm/°C	± 0.05 ppm/°C	see table 1
Low temperature storage (24 h at - 65 °C)	± 0.15 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
Low temperature operation (45 min, rated power at - 65 °C)	± 0.15 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
Terminal strength	± 0.2 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
<b>Test Group III</b>			
DWV	± 0.15 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
Resistance to solder heat	± 0.1 %	± 0.005 % (50 ppm)	± 0.01 % (100 ppm)
Moisture resistance	± 0.4 %	± 0.01 % (100 ppm)	± 0.05 % (500 ppm)
<b>Test Group IV</b>			
Shock	± 0.2 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
Vibration	± 0.2 %	± 0.002 % (20 ppm)	± 0.01 % (100 ppm)
<b>Test Group V</b>			
Life test at 0.3 W/+ 125 °C			
2000 h	± 0.5 %	± 0.005 % (50 ppm)	± 0.015 % (150 ppm)
10 000 h	± 2.0 %	± 0.015 % (150 ppm)	± 0.05 % (500 ppm)
<b>Test Group Va</b>			
Life test at 0.6 W (2 x rated power)/+ 70 °C, 2000 h	± 0.5 %	± 0.005 % (50 ppm)	± 0.015 % (150 ppm)
<b>Test Group VI</b>			
High temperature exposure (2000 h at + 175 °C)	± 2.0 %	± 0.05 % (500 ppm)	± 0.1 % (1000 ppm)
<b>Test Group VII</b>			
Voltage coefficient	5 ppm/V	< 0.1 ppm/V	< 0.1 ppm/V



**TABLE 5 - GLOBAL PART NUMBER INFORMATION (1)**

NEW GLOBAL PART NUMBER: Y145380K5000V9L (preferred part number format)

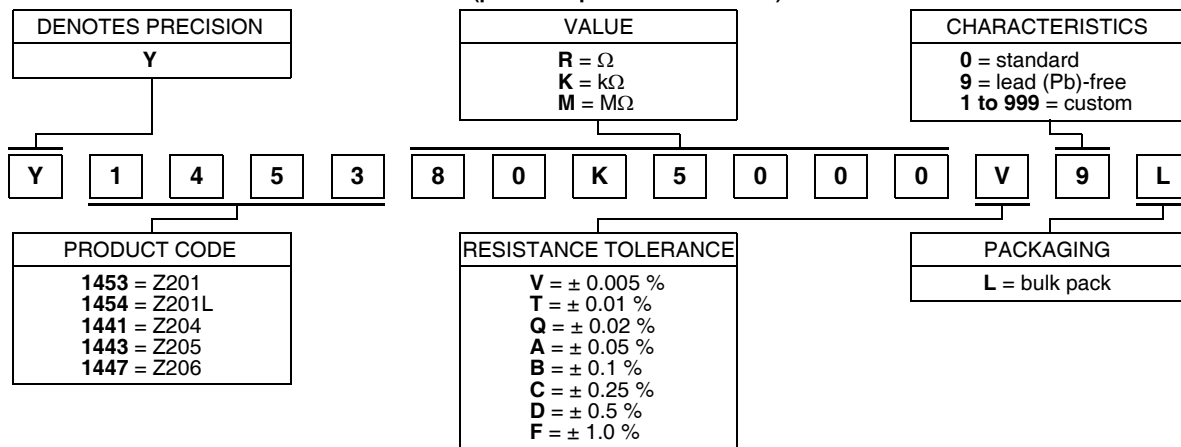

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1453 80K5000 V 9 L:

TYPE: Z201


VALUE: 80.5  $k\Omega$

ABSOLUTE TOLERANCE:  $\pm 0.005\%$

TERMINATION: lead (Pb)-free

PACKAGING: bulk pack

HISTORICAL PART NUMBER: Z201 T 250R00 V B (will continue to be used)

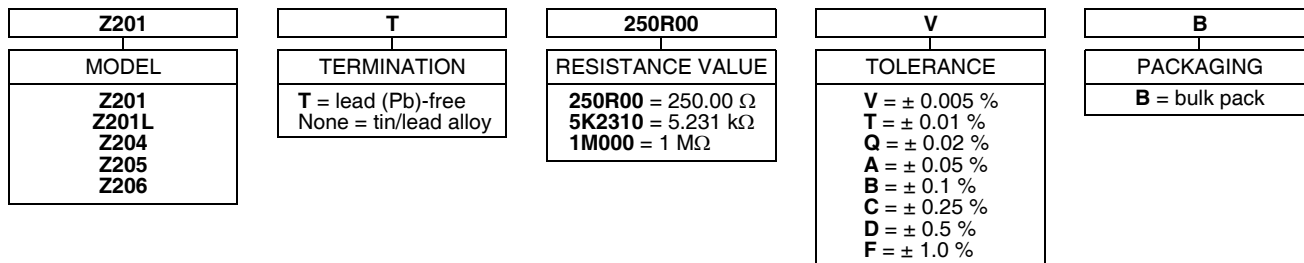

**Note**

(1) For non-standard requests, please contact application engineering.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.