

### TRANSIENT VOLTAGE SUPPRESSOR

**BREAKDOWN VOLTAGE: 6.8 --- 440 V**  
**PEAK PULSE POWER: 1500 W**


#### FEATURES

- ◇ Plastic package has underwriters laboratory flammability classification 94V-0
- ◇ Glass passivated junction
- ◇ 1500W peak pulse power capability with a 10/1000µs waveform, repetition rate (duty cycle): 0.01%
- ◇ Excellent clamping capability
- ◇ Low incremental surge resistance
- ◇ Fast response time: typically less than 1.0ps from 0 Volts to  $V_{(BR)}$  for uni-directional and 5.0ns for bi-directional types
- ◇ For devices with  $V_{(BR)} \geq 10V$ ,  $I_D$  are typically less than 1.0µA
- ◇ High temperature soldering guaranteed: 265 °C / 10 seconds, 0.375"(9.5mm) lead length, 5lbs. (2.3kg) tension

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-201AE, molded plastic
- ◇ Polarity: color band denotes positive end (cathode) except for bidirectional
- ◇ Weight: 0.032 ounces, 0.9 grams
- ◇ Mounting position: any

#### DO-201AE

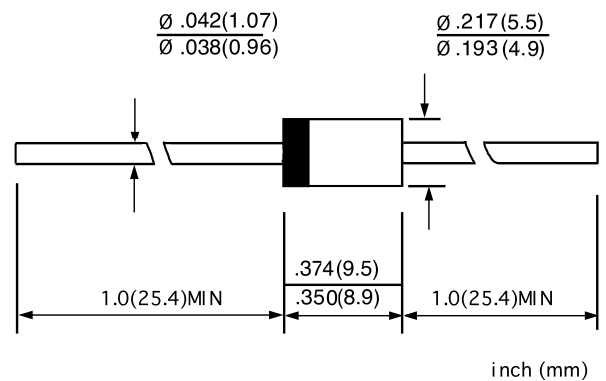

#### DEVICES FOR BIDIRECTIONAL APPLICATIONS

For bi-directional use C or CA suffix for types 1.5KE 6.8 thru types 1.5KE 440 (e.g. 1.5KE 6.8CA, 1.5KE 440CA).  
 Electrical characteristics apply in both directions.

#### MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Peak power dissipation with a 10/1000µs waveform (NOTE 1, FIG.1)	$P_{PPM}$	Minimum 1500	W
Peak pulse current with a 10/1000µs waveform (NOTE 1)	$I_{PPM}$	SEE TABLE 1	A
Steady state power dissipation at $T_L=75^\circ\text{C}$ Lead lengths 0.375"(9.5mm) (NOTE 2)	$P_{M(AV)}$	6.5	W
Peak forward surge current, 8.3ms single half Sine-wave superimposed on rated load (JEDEC Method) (NOTE 3)	$I_{FSM}$	200.0	A
Maximum instantaneous forward voltage at 100.0A for unidirectional only (NOTE 4)	$V_F$	3.5/5.0	V
Operating junction and storage temperature range	$T_J, T_{STG}$	-50---+175	°C

NOTES: (1) Non-repetitive current pulses, per Fig. 3 and derated above  $T_A=25^\circ\text{C}$  per Fig. 2

(2) Mounted on copper pad area of 1.6" x 1.6" (40 x 40mm<sup>2</sup>) per Fig. 5

(3) Measured of 8.3ms single half sine-wave or square wave, duty cycle=4 pulses per minute maximum

(4)  $V_F=3.5$  Volt max. for devices of  $V_{(BR)} \leq 200V$ , and  $V_F=5.0$  Volt max. for devices of  $V_{(BR)} > 200V$

www.galaxycn.com

ELECTRICAL CHARACTERISTICS at(T<sub>A</sub>=25 °C unless otherwise noted)

TABLE 1

Device type	Breakdown voltage V <sub>(BR)</sub> (V) <sub>(NOTE1)</sub>		Test current at I <sub>r</sub> (mA)	Stand-off voltage V <sub>WM</sub> (V)	Maximum reverse leakage at V <sub>WM</sub> I <sub>D</sub> (NOTE3)(μA)	Maximum peak pulse I <sub>PPM</sub> (NOTE2)(A)	Maximum clamping voltage at I <sub>PPM</sub> V <sub>C</sub> (V)	Maximum temperature coefficient of V <sub>(BR)</sub> (%/°C)
	Min	Max						
+1.5KE 6.8	6.12	7.48	10.0	5.50	1000	145	10.8	0.057
+1.5KE 6.8A	6.45	7.14	10.0	5.80	1000	150	10.5	0.057
+1.5KE 7.5	6.75	8.25	10.0	6.00	500	134	11.7	0.061
+1.5KE 7.5A	7.13	7.88	10.0	6.40	500	139	11.3	0.061
+1.5KE 8.2A	7.38	9.02	10.0	6.60	200	126	12.5	0.065
+1.5KE 8.2A	7.79	8.61	10.0	7.00	200	130	12.1	0.065
+1.5KE 9.1	8.19	10.0	1.0	7.30	50	114	13.8	0.068
+1.5KE 9.1A	8.65	9.55	1.0	7.70	50	117	13.4	0.068
+1.5KE 10	9.0	11.0	1.0	8.10	10	105	15.0	0.073
+1.5KE 10A	9.5	10.5	1.0	8.50	10	108	14.5	0.073
+1.5KE 11	9.9	12.1	1.0	8.90	5.0	97.0	16.2	0.075
+1.5KE 11A	10.5	11.6	1.0	9.40	5.0	100.0	15.6	0.075
+1.5KE 12	10.8	13.2	1.0	9.70	5.0	91.0	17.3	0.076
+1.5KE 12A	11.4	12.6	1.0	10.2	5.0	94.0	16.7	0.078
+1.5KE 13	11.7	14.3	1.0	10.5	5.0	82.0	19.0	0.081
+1.5KE 13A	12.4	13.7	1.0	11.1	5.0	86.0	18.2	0.081
+1.5KE 15	13.5	16.5	1.0	12.1	5.0	71.0	22.0	0.084
+1.5KE 15A	14.3	15.8	1.0	12.8	5.0	74.0	21.2	0.084
+1.5KE 16	14.4	17.6	1.0	12.9	5.0	67.0	23.5	0.086
+1.5KE 16A	15.2	16.8	1.0	13.6	5.0	70.0	22.5	0.086
+1.5KE 18	16.2	19.8	1.0	14.5	5.0	59.0	26.5	0.088
+1.5KE 18A	17.1	18.9	1.0	15.3	5.0	60.0	25.2	0.089
+1.5KE 20	18.0	22.0	1.0	16.2	5.0	54.0	29.1	0.090
+1.5KE 20A	19.0	21.0	1.0	17.1	5.0	56.0	27.7	0.090
+1.5KE 22	19.8	24.2	1.0	17.8	5.0	49.0	31.9	0.092
+1.5KE 22A	20.9	23.1	1.0	18.8	5.0	51.0	30.6	0.092
+1.5KE 24	21.6	26.4	1.0	19.4	5.0	45.0	34.7	0.094
+1.5KE 24A	22.8	25.2	1.0	20.5	5.0	47.0	33.2	0.094
+1.5KE 27	24.3	29.7	1.0	21.8	5.0	40.0	39.1	0.096
+1.5KE 27A	25.7	28.4	1.0	23.1	5.0	42.0	37.5	0.096
+1.5KE 30	27.0	33.0	1.0	24.3	5.0	36.0	43.5	0.097
+1.5KE 30A	28.5	31.5	1.0	25.6	5.0	38.0	41.4	0.097
+1.5KE 33	29.7	36.3	1.0	26.8	5.0	33.0	47.7	0.098
+1.5KE 33A	31.4	34.7	1.0	28.2	5.0	34.0	45.7	0.098
+1.5KE 36	32.4	39.6	1.0	29.1	5.0	30.0	52.0	0.099
+1.5KE 36A	34.2	37.8	1.0	30.8	5.0	31.0	49.9	0.099
+1.5KE 39	35.1	42.9	1.0	31.6	5.0	27.0	56.4	0.100
+1.5KE 39A	37.1	41.0	1.0	33.3	5.0	29.0	53.9	0.100
+1.5KE 43	38.7	47.3	1.0	34.8	5.0	25.0	61.9	0.101
+1.5KE 43A	40.9	45.2	1.0	36.8	5.0	26.0	59.3	0.101
+1.5KE 47	42.3	51.7	1.0	38.1	5.0	23.0	67.8	0.101
+1.5KE 47A	44.7	49.4	1.0	40.2	5.0	24.0	64.8	0.101
1.5KE 51	45.9	56.1	1.0	41.3	5.0	21.0	73.5	0.102
1.5KE 51A	48.5	53.6	1.0	43.6	5.0	22.0	70.1	0.102
1.5KE56	50.4	61.8	1.0	45.4	5.0	19.0	80.5	0.103
1.5KE56A	53.2	58.8	1.0	47.8	5.0	20.0	77.0	0.103


ELECTRICAL CHARACTERISTICS at(T<sub>A</sub>=25 °C unless otherwise noted)

TABLE 1(Cont' d)


Device type	Breakdown voltage V <sub>(BR)</sub> (V)(NOTE1)		Test current at I <sub>r</sub> (mA)	Stand-off voltage V <sub>WM</sub> (V)	Maximum reverse leakage at V <sub>WM</sub> I <sub>D</sub> (NOTE3)(μA)	Maximum peak pulse I <sub>PPM</sub> (NOTE2) (A)	Maximum damping voltage at I <sub>PPM</sub> V <sub>C</sub> (V)	Maximum temperature coefficient of V <sub>(BR)</sub> (%/°C)
	Min	Max						
1.5KE62	55.8	68.8	1.0	50.2	5.0	17.0	89.0	0.104
1.5KE62A	58.9	65.1	1.0	53.0	5.0	18.0	85.0	0.104
1.5KE68	61.2	74.8	1.0	55.1	5.0	16.0	98.0	0.104
1.5KE68A	64.6	71.4	1.0	58.1	5.0	17.0	92.0	0.104
1.5KE75	67.5	82.5	1.0	60.7	5.0	14.0	108	0.105
1.5KE75A	71.3	78.8	1.0	64.1	5.0	15.0	103	0.105
1.5KE82	73.8	90.2	1.0	66.4	5.0	13.0	118	0.105
1.5KE82A	77.9	86.1	1.0	70.1	5.0	13.9	113	0.105
1.5KE91	81.9	100	1.0	73.7	5.0	12.0	131	0.106
1.5KE91A	86.5	95.5	1.0	77.8	5.0	12.6	125	0.106
1.5KE100	90.0	110	1.0	81.0	5.0	10.9	144	0.106
1.5KE100A	95.0	105	1.0	85.5	5.0	11.4	137	0.106
1.5KE110	99.0	121	1.0	89.2	5.0	9.9	158	0.107
1.5KE110A	105	116	1.0	94.0	5.0	10.3	152	0.107
1.5KE120	108	132	1.0	97.2	5.0	9.1	173	0.107
1.5KE120A	114	126	1.0	102	5.0	9.5	165	0.107
1.5KE130	117	143	1.0	105	5.0	8.4	187	0.107
1.5KE130A	124	137	1.0	111	5.0	8.7	179	0.107
1.5KE150	135	165	1.0	121	5.0	7.3	215	0.108
1.5KE150A	143	158	1.0	128	5.0	7.6	207	0.106
1.5KE160	144	176	1.0	130	5.0	6.8	230	0.106
1.5KE160A	152	168	1.0	136	5.0	7.1	219	0.108
1.5KE170	153	187	1.0	138	5.0	6.4	244	0.108
1.5KE170A	162	179	1.0	145	5.0	6.7	234	0.108
1.5KE180	162	198	1.0	146	5.0	6.1	258	0.108
1.5KE180A	171	189	1.0	154	5.0	6.4	246	0.108
1.5KE200	180	220	1.0	162	5.0	5.4	287	0.108
1.5KE200A	190	210	1.0	171	5.0	5.7	274	0.108
1.5KE220	198	242	1.0	175	5.0	4.5	344	0.108
1.5KE220A	209	231	1.0	185	5.0	4.8	328	0.108
1.5KE250	225	275	1.0	202	5.0	4.3	360	0.110
1.5KE250A	237	263	1.0	214	5.0	4.5	344	0.110
1.5KE300	270	330	1.0	243	5.0	3.6	430	0.110
1.5KE300A	285	315	1.0	256	5.0	3.8	414	0.110
1.5KE350	315	385	1.0	284	5.0	3.1	504	0.110
1.5KE350A	332	368	1.0	300	5.0	3.2	482	0.110
1.5KE400	360	440	1.0	324	5.0	2.7	574	0.110
1.5KE400A	380	420	1.0	342	5.0	2.8	548	0.110
1.5KE440	396	484	1.0	356	5.0	2.4	631	0.110
1.5KE440A	418	462	1.0	376	5.0	2.6	602	0.110

NOTE: For bidirectional use C or CA suffix for types 1.5KE6.8CA thru types 1.5KE440A(e.g.1.5KE7.5CA,1.5KE440CA). Electrical characteristics apply in both directions. [www.galaxycn.com](http://www.galaxycn.com)


**FIG.1 – PEAK PULSE POWER RATING CURVE**

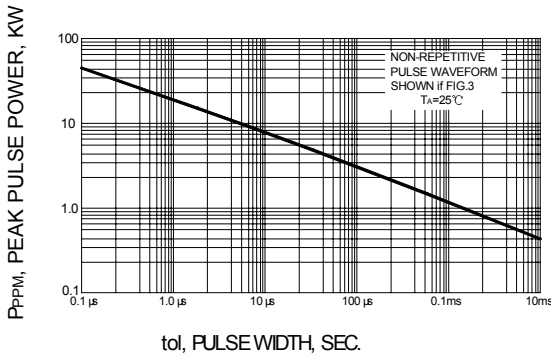


**FIG.3 – PULSE WAVEFORM**

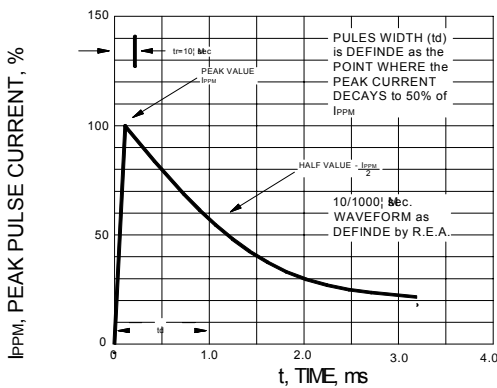


**FIG.5 – STEADY STATE POWER DERATING CURVE**

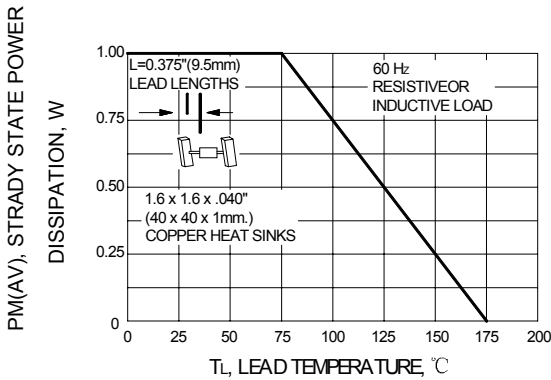


**FIG.7 – TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

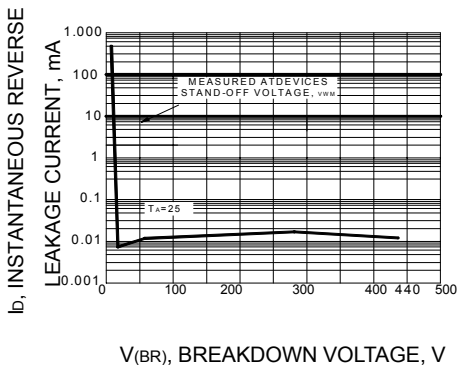

**FIG.2 – PULSE DERATING CURVE**

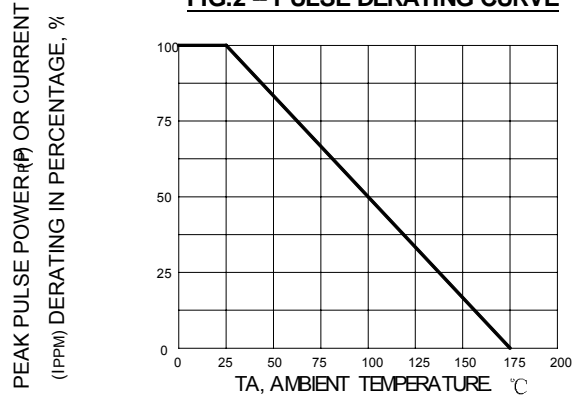

**FIG.4 – TYPICAL JUNCTION CAPACITANCE UNIDIRECTIONAL**

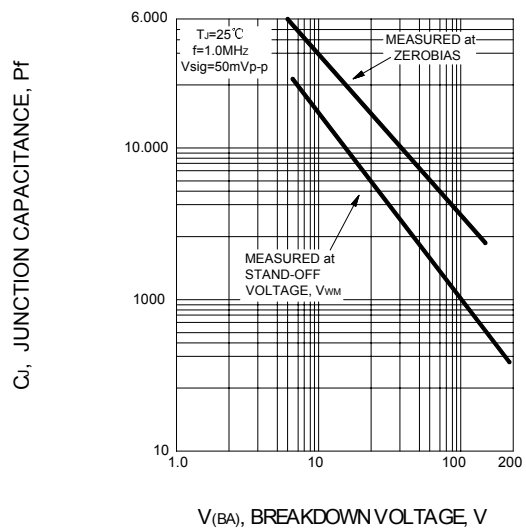

**FIG.6 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY**

