




## Product information ELST 3308 RV FM 8 05

Industrial Connecting Solutions:Archive - Industrial Connectors:Circular connectors E-series M8 (Archive):with screw locking:Appliance socket and appliance connector for front panel mounting:ELST 3308 RV FM 8 05

<http://dev-catalog.beldensolutions.com/link/57078-24228-62529-24238-24243-24248-37243/en/conf/ui/state>

<b>Name</b>	ELST 3308 RV FM 8 05
	
	Front-mounting appliance connector with stranded wire, snap or screw locking, M8 x 0.5 mounting thread, metal casing, O-ring included
<b>Delivery informations</b>	
<b>Availability</b>	available until: 31.12.2036
<b>Product description</b>	
<b>Description</b>	Front-mounting appliance connector with stranded wire, snap or screw locking, M8 x 0.5 mounting thread, metal casing, O-ring included
<b>Type</b>	ELST 3308 RV FM 8 05
<b>Order No.</b>	933 146-001
<b>Type of contact</b>	male
<b>Number of contacts</b>	3
<b>Cable material</b>	PVC
<b>Cable length</b>	0.5 m
<b>Conductor size</b>	0.25 mm <sup>2</sup>
<b>Standard</b>	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
<b>Housing Color</b>	metallic
<b>Technical data</b>	
<b>Pin dimensions</b>	1 mm
<b>Wire stranding</b>	14 x 0.15 mm
<b>Rated voltage</b>	AC/DC 60 V
<b>Rated current</b>	3 A
<b>Material</b>	
<b>Contact material</b>	Cu Zn
<b>Contact surface material</b>	Au
<b>Contact bearer material</b>	PA black
<b>Housing material</b>	Cu Zn/Ni
<b>O-Ring</b>	NBR
<b>Environmental conditions</b>	
<b>Protection class (IEC 60529)</b>	IP 67 (with snap locking),
<b>Pollution severity</b>	3
<b>Temperature range</b>	-25 °C to +90 °C
<b>Inflammability class</b>	
<b>Contact bearer</b>	94 V-2
<b>Approvals</b>	
<b>UL</b>	UL
<b>Packing unit</b>	
<b>Packaging unit</b>	100 pieces
<b>Scope of delivery and accessories</b>	
<b>Accessories to order separately</b>	fastening nut ELST M M8, order no. 734 032-001




Industrial Connecting Solutions:Archive - Industrial Connectors:Circular connectors E-series M8 (Archive);with screw locking:Appliance socket and appliance connector for front panel mounting:ELST 3308 RV FM 8 05

<http://dev-catalog.beldensolutions.com/link/57078-24228-62529-24238-24243-24248-37243/en/conf/ulistate>

Picture

Drawing

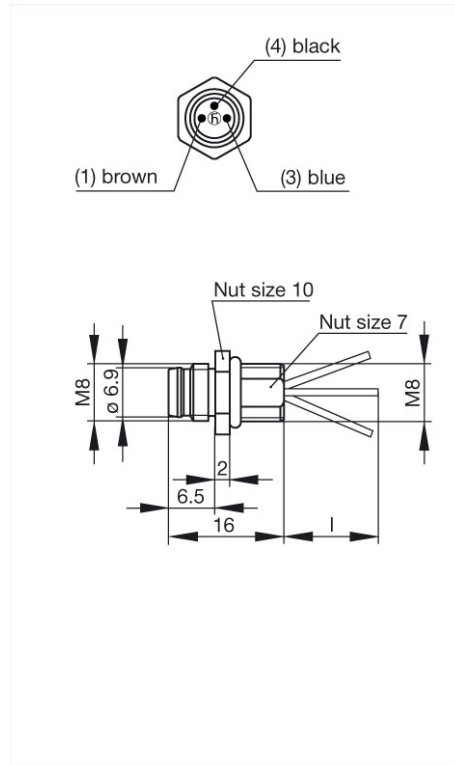

**Belden Deutschland GmbH**

Im Gewerbepark 2  
58579 Schalksmühle  
Germany  
Phone: +49 7127/14-1806  
E-Mail: [icos-sales@belden.com](mailto:icos-sales@belden.com)

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.