

DESCRIPTION



The LM101, LM201, LM101A, LM201A, and LM301A are high performance operational amplifiers featuring high gain, short circuit protection, simplified compensation and excellent temperature stability.

The LH2101A, LH2201A, LH2301A are dual amplifiers using two LM101A type devices in the same hermetic package. All electrical specifications are the same as the single amplifiers.


FEATURES

- Short circuit protection
- Offset voltage null capability
- Large common-mode and differential voltage ranges
- Low power consumption
- No latch up
- LM101, LM101A Mil std 883A,B,C available
- LM101A Mil std 38510 (JAN) planned, Mil std M38510 processing available

PIN CONFIGURATIONS

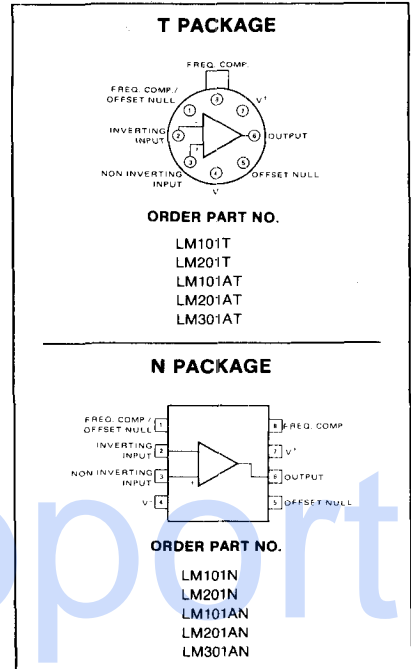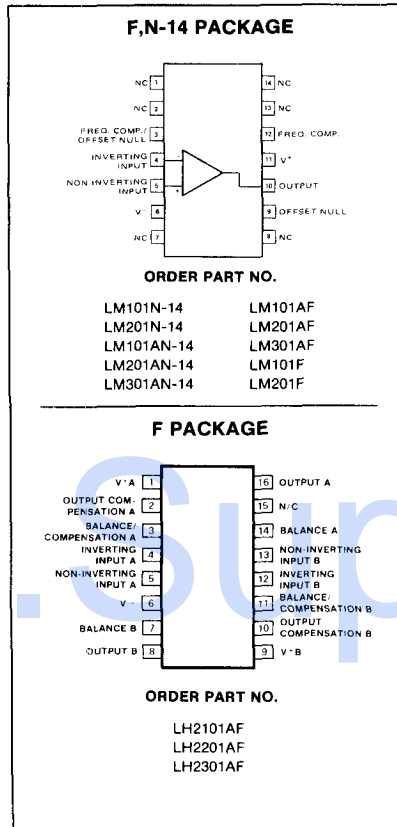

EQUIVALENT SCHEMATIC

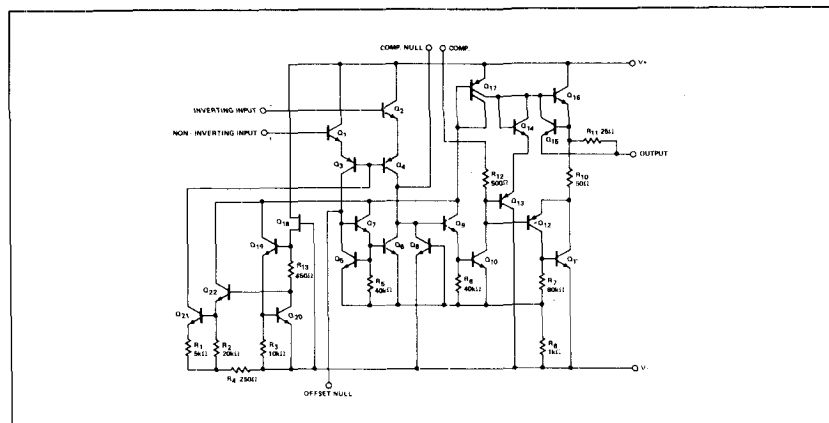

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | RATING | UNIT |
|--|---------------------------------------|----------------|
| Supply Voltage LH2101A, LH2201A, LM101, LM201, LM101A, LM201A LM301A, LH2301A | ±22 | V |
| Power dissipation ¹ | 500 | mW |
| Differential input voltage | ±30 | V |
| Input voltage ² | ±15 | V |
| Output short circuit duration | Indefinite | |
| Operating temperature range LM101, LM101A, LH2101A LM201A, LH2201A LM201, LM301A, LH2301A | -55 to +125 -25 to +85 0 to +70 | °C °C °C |
| Storage temperature range | -65 to +150 | °C |
| Lead temperature (soldering 60sec) | 300 | °C |

NOTES

1. Absolute maximum rating holds for all packages. The maximum junction temperature is 150°C for the LM101 and 100°C for the LM201. For operation at elevated temperatures, derate according to appropriate thermal resistances given under package information.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

DC ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, $\pm 5\text{V} \leq V_S \leq +20\text{V}$ unless otherwise specified.*

| PARAMETER | TEST CONDITIONS | LM101 | | | LM201 | | | UNIT |
|-------------------------------------|--|----------|-----------------|-------------------|----------|------------------|-------------------|--|
| | | Min | Typ | Max | Min | Typ | Max | |
| V_{OS} Offset voltage | $R_S \leq 10\text{k}\Omega$, $C_1 = 30\text{pF}$ Over temp. | | 1.0 | 5.0 6.0 | | 2.0 | 7.5 10 | mV mV |
| V_{OS} Drift | $R_S \leq 50\Omega$, $C_1 = 30\text{pF}$ $R_S \leq 10\text{k}\Omega$ | | 3.0 6.0 | | | 6 10 | | $\mu\text{V}/^\circ\text{C}$ $\mu\text{V}/^\circ\text{C}$ |
| I_{OS} Offset current | $C_1 = 30\text{pF}$ $T_A = \text{high}$, $C_1 = 30\text{pF}$ $T_A = \text{low}$ Over temp. $T_A = +70^\circ\text{C}$ $T_A = 0^\circ\text{C}$ | | 40 10 100 | 200 200 500 | | 100 50 150 | 500 400 750 | nA nA nA nA nA nA |
| I_{BIAS} Input current | $C_1 = 30\text{pF}$ $T_A = -55^\circ\text{C}$, $C_1 = 30\text{pF}$ $T_A = 0^\circ\text{C}$ | | 120 280 | 500 1500 | | 250 320 | 1500 2000 | nA nA nA |
| V_{CM} Common mode voltage range | Over temp., $V_S = \pm 15\text{V}$, $C_1 = 30\text{pF}$ | ±12 | | | ±12 | | | V |
| CMRR Common mode rejection ratio | $R_S \leq 10\text{k}\Omega$, $C_1 = 30\text{pF}$, over temp. | 70 | 90 | | 65 | 90 | | dB |
| R_{IN} Input resistance | $C_1 = 30\text{pF}$ | 0.3 | 0.8 | | 0.1 | 0.4 | | MΩ |
| A_{VOL} Large signal voltage gain | $R_L \geq 2\text{k}\Omega$, $V_{OUT} \pm 10\text{V}$, $V_S = \pm 15\text{V}$ Over temp. | 50 25 | 160 | | 20 15 | 150 | | V/mV V/mV |
| Supply current | $V_S = \pm 20\text{V}$ | | 1.8 | 3.0 | | 1.8 | 3.0 | mA |

***NOTE**

Unless otherwise specified, all specifications for LM301A are $\pm 5\text{V} \leq V_S \leq \pm 15\text{V}$.

DC ELECTRICAL CHARACTERISTICS (Cont'd) $T_A = 25^\circ\text{C}$, $\pm 5\text{V} \leq V_S \leq +20\text{V}$ unless otherwise specified.*


| PARAMETER | TEST CONDITIONS | LM101A/LM201A/ LH2101A/LH2201A | | | LM301A/LH2301A | | | UNIT |
|-------------------------------------|--|-----------------------------------|--------------|------------|----------------|--------------|------------|--|
| | | Min | Typ | Max | Min | Typ | Max | |
| V_{OS} Offset voltage | $R_S \leq 50\text{k}\Omega$, $C_1 = 30\text{pF}$ Over temp. | | 0.7 | 2.0 3.0 | | 2.0 | 7.5 10 | mV mV |
| V_{OS} Drift | $R_S = 0\Omega$, over temp. | | 3.0 | 1.5 | | 6.0 | 30 | $\mu\text{V}/^\circ\text{C}$ |
| I_{OS} Offset current | $C_1 = 30\text{pF}$ Over temp. | | 1.5 | 10 20 | | 3 | 50 70 | nA nA |
| I_{OS} Drift | $+25^\circ\text{C} \leq T_A \leq T_{MAX}$, $C_1 = 30\text{pF}$ $T_{MIN} \leq T_A \leq +25^\circ\text{C}$ | | 0.01 0.02 | 0.1 0.2 | | 0.01 0.02 | 0.3 0.6 | nA/ $^\circ\text{C}$ nA/ $^\circ\text{C}$ |
| I_{BIAS} Input current | $C_1 = 30\text{pF}$ Over temp. | | 30 | 75 100 | | 70 | 250 300 | nA nA |
| V_{CM} Common mode voltage range | Over temp., $V_S = \pm 15\text{V}$, $C_1 = 30\text{pF}$ $V_S = \pm 20$ | ± 15 | | | ± 12 | | | V V |
| CMRR Common mode rejection ratio | $R_S \leq 50\text{k}\Omega$, $C_1 = 30\text{pF}$, over temp. | 80 | 96 | | 70 | 90 | | dB |
| R_{IN} Input resistance | $C_1 = 30\text{pF}$ | 1.5 | 4 | | 0.5 | 2 | | M Ω |
| A_{VOL} Large signal voltage gain | $R_L \geq 2\text{k}\Omega$, $V_{OUT} \pm 10\text{V}$, $V_S = \pm 15\text{V}$ Over temp. | 50 25 | 160 | | 25 15 | 160 | | V/mV V/mV |
| Supply current | $V_S = \pm 20\text{V}$ $V_S = \pm 15\text{V}$ | | 1.8 | 3.0 | | 1.8 | 3.0 | mA mA |

*NOTE


Unless otherwise specified, all specifications for LM301A are $\pm 5\text{V} \leq V_S \leq \pm 15\text{V}$.

TYPICAL PERFORMANCE CHARACTERISTICS


INPUT VOLTAGE RANGE vs SUPPLY VOLTAGE




OUTPUT SWING vs SUPPLY VOLTAGE




VOLTAGE GAIN vs SUPPLY VOLTAGE




VOLTAGE GAIN




SUPPLY CURRENT




CURRENT LIMITING




INPUT CURRENT




MAXIMUM POWER DISSIPATION



OPEN LOOP FREQUENCY RESPONSE




TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

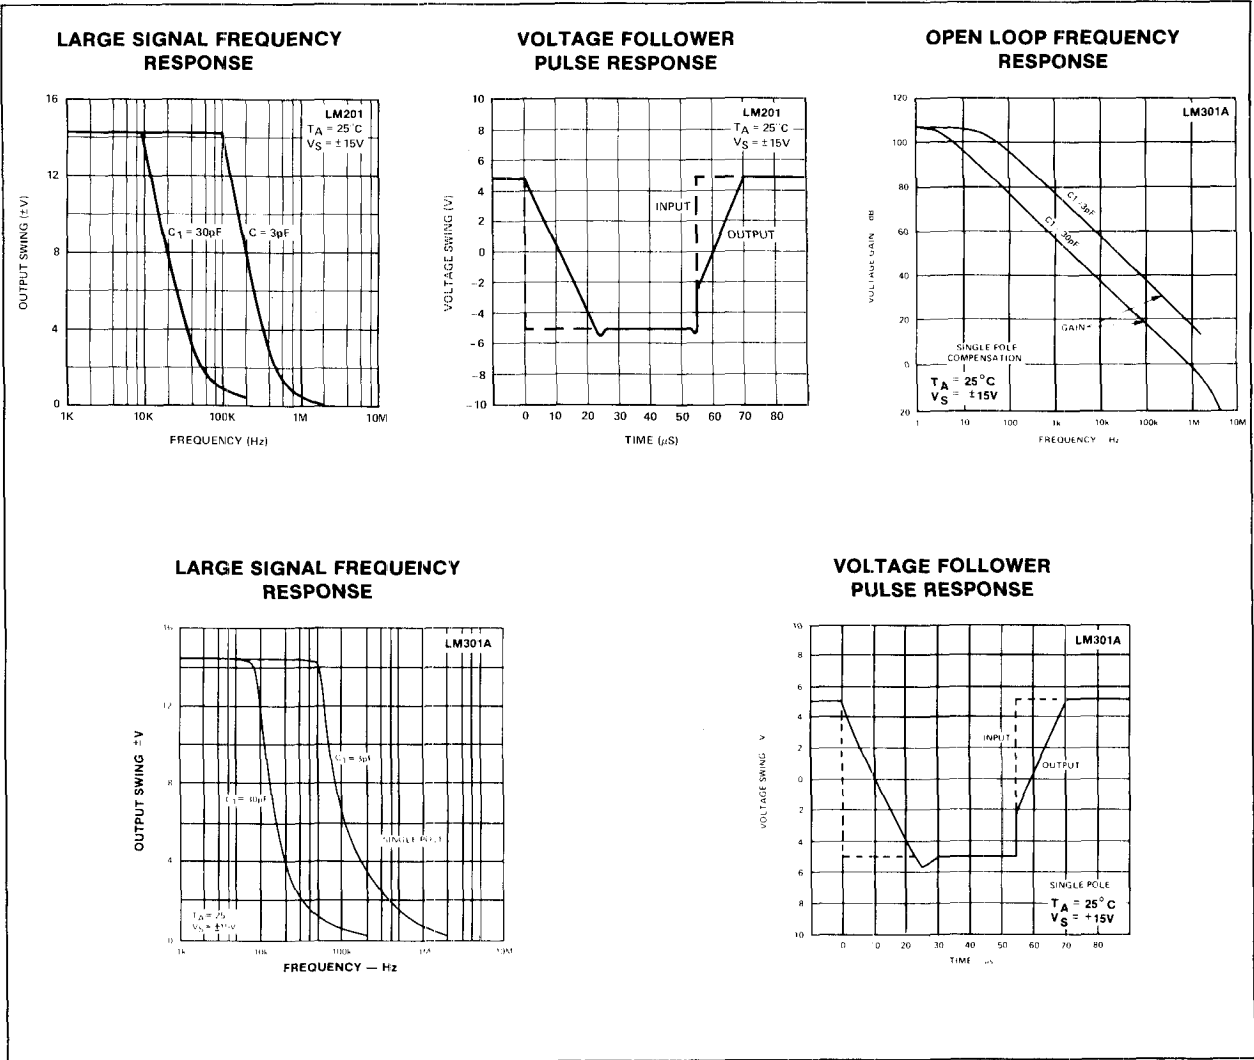


TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)


VOLTAGE GAIN

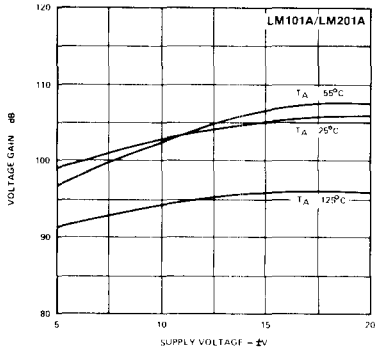


SUPPLY CURRENT

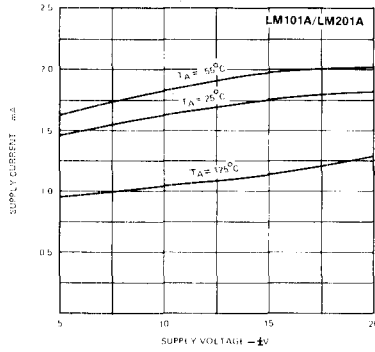


INPUT CURRENT

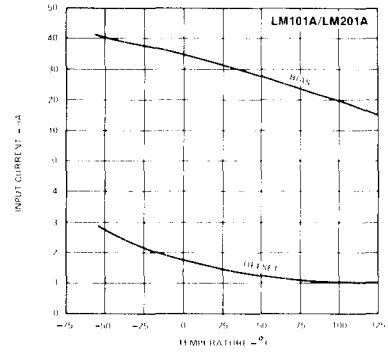


CURRENT LIMITING

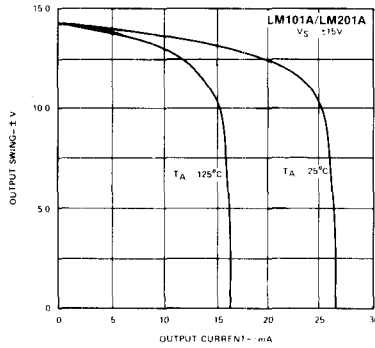


INPUT NOISE VOLTAGE

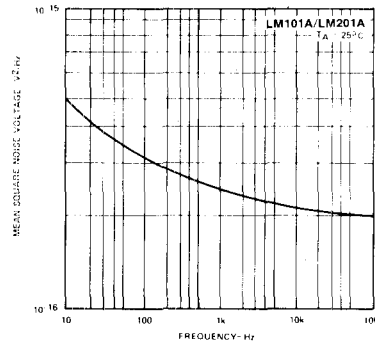


INPUT NOISE CURRENT

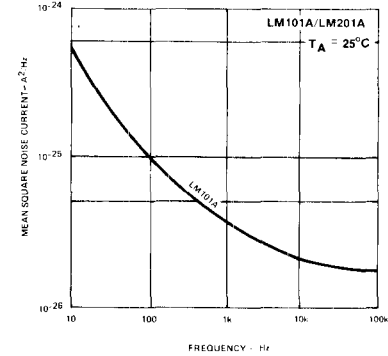


COMMON MODE REJECTION

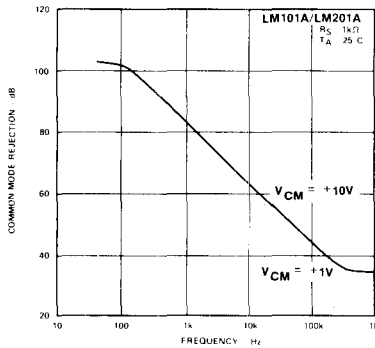


POWER SUPPLY REJECTION

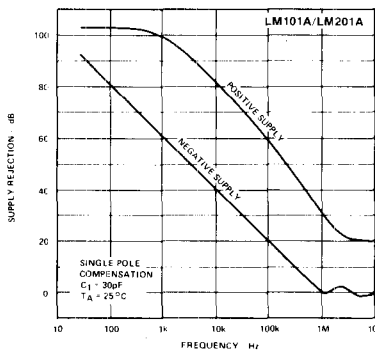

CLOSED LOOP OUTPUT IMPEDANCE

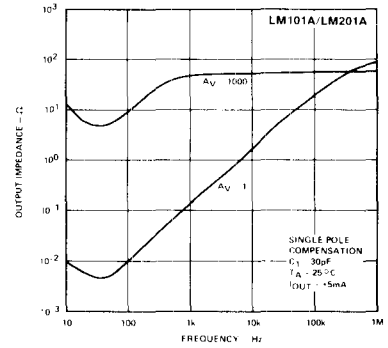


TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

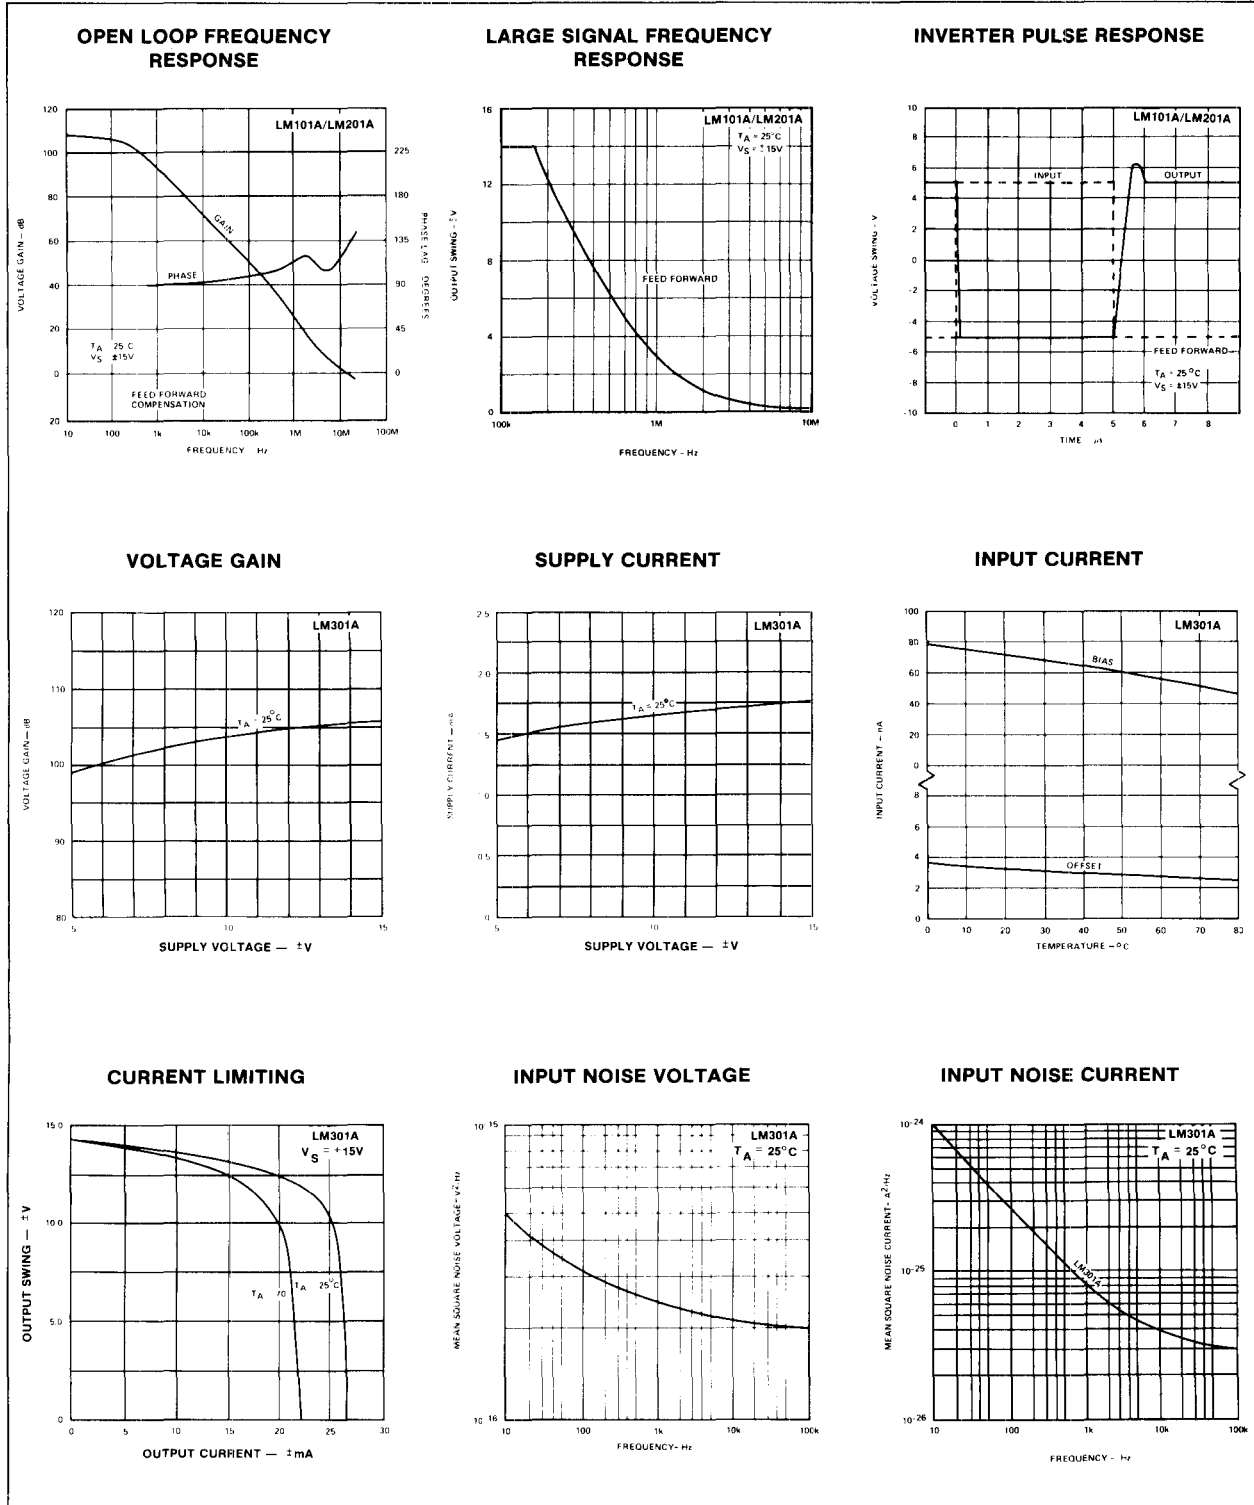


TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)


OPEN LOOP FREQUENCY RESPONSE

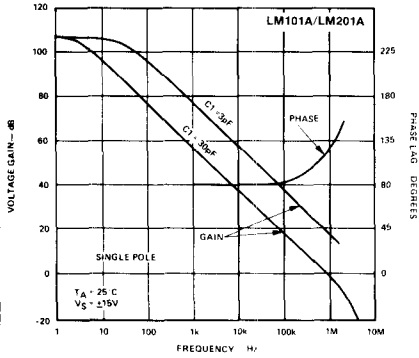


VOLTAGE FOLLOWER PULSE RESPONSE

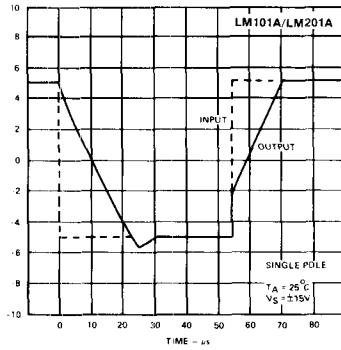


LARGE SIGNAL FREQUENCY RESPONSE

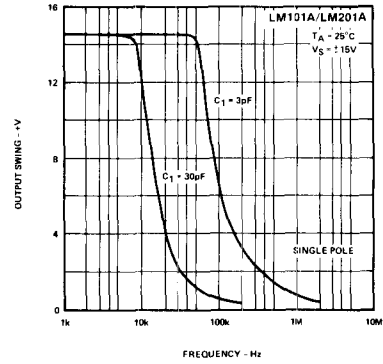


OPEN LOOP FREQUENCY RESPONSE

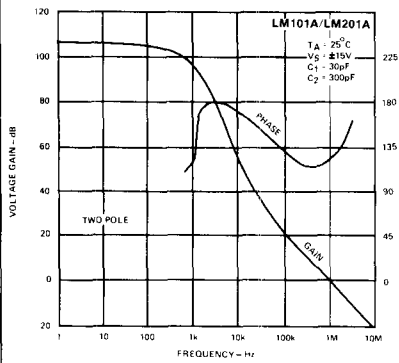


LARGE SIGNAL FREQUENCY RESPONSE

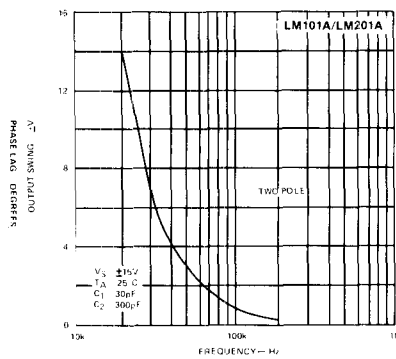

VOLTAGE FOLLOWER PULSE RESPONSE

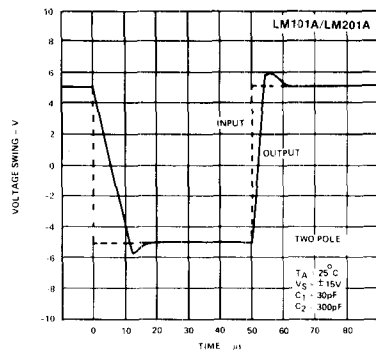


GUARANTEED PERFORMANCE CHARACTERISTICS

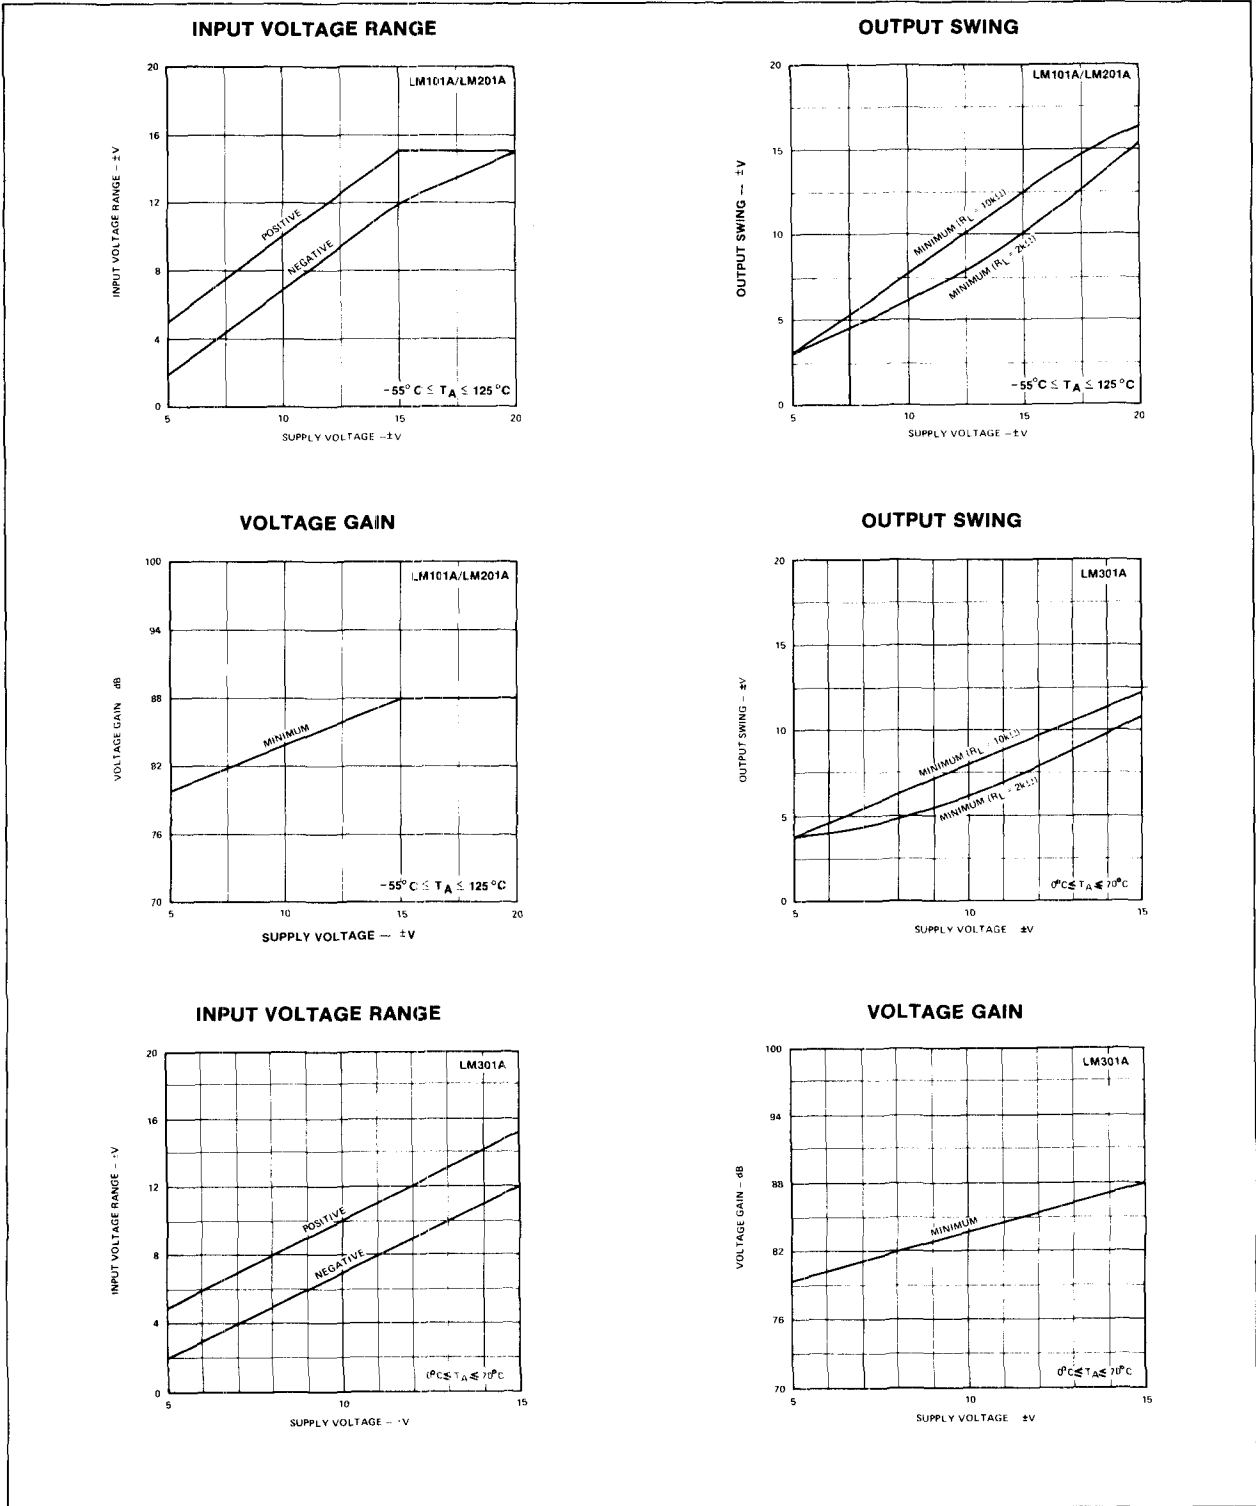


COMPENSATION CIRCUITS

SINGLE POLE
COMPENSATION




NOTE: Pin connections shown are for T package.

TWO POLE
COMPENSATION

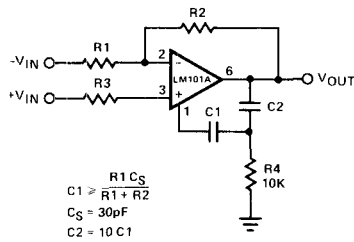


FEED FORWARD
COMPENSATION



TYPICAL APPLICATIONS


INVERTING AMPLIFIER WITH
BALANCING CIRCUIT



†May be zero or equal to parallel combination of R_1 and R_2 for minimum offset.

NOTE: Pin numbers shown refer to T or N package only.

LOW DRIFT SAMPLE
AND HOLD

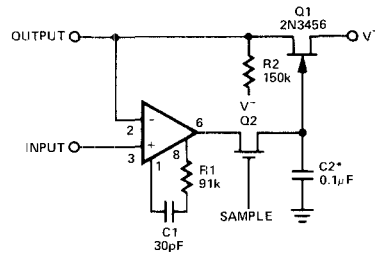

*Polycarbonate Dielectric Capacitor

NOTE: Pin numbers shown refer to T or N package only.