


QPL MIL-PRF-55342 Qualified Thin Film Resistor Chips

SURFACE MOUNT CHIPS

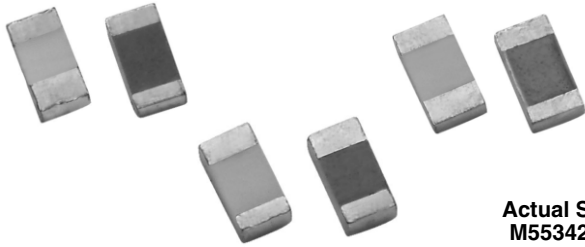

Actual Size
M55342/02

Thin Film Mil chip resistors feature all sputtered wraparound termination for excellent adhesion and dimensional uniformity. They are ideal in applications requiring stringent performance requirements. Established reliability is assured through 100 % screening and extensive environmental lot testing. Wafer is sawed producing exact dimensions and clean, straight edges.


Note

- Specification changed by DSCC from MIL-R-55342 to MIL-PRF-55342

FEATURES

- Established reliability, “R” failure rate level (100 ppm), C = 2
- High purity alumina substrate 99.6 % purity
- Wraparound termination featuring a tenacious adhesion layer covered with an electroplated nickel barrier layer for + 150 °C operating conditions
- Very low noise and voltage coefficient (< - 25 dB, 0.5 ppm/V)
- Non-inductive
- Laser-trimmed tolerances ± 0.1 %
- Wraparound resistance less than 0.010 Ω typical
- In-lot tracking less than 5 ppm/°C
- Complete MIL-testing available in-house
- Antistatic waffle pack or tape and reel packaging available
- Military/aerospace/QPL

CONSTRUCTION

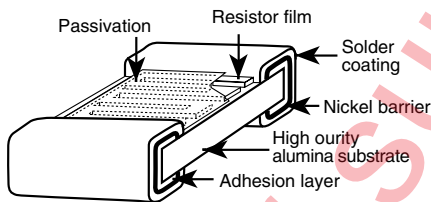


TYPICAL PERFORMANCE

| | ABS |
|-----|-----|
| TCR | 25 |
| TOL | 0.1 |

| STANDARD ELECTRICAL SPECIFICATIONS | | |
|------------------------------------|---------------------------------|---------------------|
| Test | SPECIFICATIONS | CONDITIONS |
| Material | Passivated nichrome | |
| Absolute TCR | ± 25 ppm/°C to ± 300 ppm/°C TCR | - 55 °C to + 125 °C |
| Absolute Tolerance | ± 0.1 % | + 25 °C |
| Stability: ΔR Absolute | ± 0.1 % | 2000 h at + 70 °C |
| Voltage Coefficient | ± 0.5 ppm/V | |
| Operating Temperature Range | - 55 °C to + 125 °C | |
| Storage Temperature Range | - 55 °C to + 150 °C | |
| Noise | - 25 dB | |
| Shelf Life Stability | 100 ppm | 1 year at + 25 °C |

DIMENSIONS



| CASE SIZE | TERM. | L | W | T | D | E |
|-----------|-------|-----------------------|---------------|----------------|-----------------------|-----------------------|
| M55342/01 | B | 0.055 ± 0.006 | 0.025 ± 0.005 | 0.010 to 0.030 | 0.010 ± 0.005 | 0.015 ± 0.005 |
| M55342/02 | B | 0.055 ± 0.006 | 0.050 ± 0.005 | 0.012 to 0.033 | 0.010 ± 0.005 | 0.015 ± 0.005 |
| M55342/03 | B | 0.105 ± 0.007 | 0.050 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005 | 0.015 ± 0.005 |
| M55342/04 | B | 0.155 ± 0.007 | 0.050 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005 | 0.015 ± 0.005 |
| M55342/05 | B | 0.230 ± 0.007 | 0.075 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005 | 0.020 ± 0.005 |
| M55342/06 | B | 0.080 ± 0.006 | 0.050 ± 0.005 | 0.015 to 0.033 | 0.016 ± 0.008 | 0.015 ± 0.005 |
| D55342/07 | B | 0.126 ± 0.008 | 0.063 ± 0.005 | 0.015 to 0.033 | 0.020 + 0.005/- 0.010 | 0.020 + 0.005/- 0.010 |
| M55342/08 | B | 0.209 + 0.009/- 0.018 | 0.098 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005 | 0.020 ± 0.005 |
| M55342/09 | B | 0.259 + 0.009/- 0.015 | 0.124 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005 | 0.020 ± 0.005 |
| M55342/10 | B | 0.105 ± 0.007 | 0.100 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005 | 0.015 ± 0.005 |
| M55342/11 | B | 0.040 ± 0.005 | 0.025 ± 0.005 | 0.010 to 0.030 | 0.010 ± 0.005 | 0.015 ± 0.005 |
| M55342/12 | B | 0.064 ± 0.006 | 0.032 ± 0.005 | 0.010 to 0.033 | 0.012 ± 0.005 | 0.015 ± 0.005 |

SURFACE MOUNT CHIPS

| CASE SIZE | MAX. WORKING VOLTAGE | POWER RATING (mW) | RESISTANCE RANGE (Ω) BY CHARACTERISTICS TOLERANCE | | | |
|-----------|----------------------|-------------------|---|-------------------|-----------------|-------------------------|
| | | | E (0.1 %) | E (1 %, 2 %, 5 %) | H, K, M (0.1 %) | H, K, M (1 %, 2 %, 5 %) |
| M55342/01 | 40 | 50 | 49.9 to 150K | 49.9 to 150K | 20 to 150K | 20 to 150K |
| M55342/02 | 40 | 125 | 49.9 to 301K | 49.9 to 301K | 20 to 301K | 20 to 301K |
| M55342/03 | 75 | 200 | 49.9 to 649K | 49.9 to 649K | 10 to 649K | 10 to 649K |
| M55342/04 | 125 | 150 | 49.9 to 1.69M | 49.9 to 1.69M | 10 to 1.69M | 10 to 1.69M |
| M55342/05 | 175 | 225 | 49.9 to 3.16M | 49.9 to 3.16M | 10 to 3.16M | 10 to 3.16M |
| M55342/06 | 50 | 150 | 49.9 to 475K | 49.9 to 475K | 10 to 475K | 10 to 475K |
| D55342/07 | 100 | 250 | 49.9 to 1.5M | 49.9 to 1.5M | 10 to 1.5M | 10 to 1.5M |
| M55342/08 | 150 | 800 | 49.9 to 4.02M | 49.9 to 4.02M | 10 to 4.02M | 10 to 4.02M |
| M55342/09 | 200 | 1000 | 49.9 to 6.19M | 49.9 to 6.19M | 10 to 6.19M | 10 to 6.19M |
| M55342/10 | 75 | 500 | 49.9 to 1M | 49.9 to 1M | 49.9 to 1M | 49.9 to 1M |
| M55342/11 | 30 | 50 | 49.9 to 100K | 49.9 to 100K | 20 to 100K | 20 to 100K |
| M55342/12 | 50 | 100 | 49.9 to 258K | 49.9 to 261K | 10 to 258K | 10 to 261K |

Note

- Values listed are a guide, refer to mil spec for value/tolerance allowance

| ENVIRONMENTAL TESTS | | |
|--------------------------------------|---|---------------------------------------|
| TEST | MIL-PRF-55342 LIMITS ($\Delta R \pm$) | VISHAY PERFORMANCE ($\Delta R \pm$) |
| Thermal Shock | 0.1 % | 0.020 % |
| Low Temperature Operation | 0.1 % | 0.025 % |
| Short Time Overload | 0.1 % | 0.050 % |
| High Temperature Exposure | 0.1 % | 0.009 % |
| Resistance to Bonding | 0.2 % | 0.006 % |
| Moisture Resistance | 0.2 % | 0.004 % |
| TCR | ± 25 ppm/ $^{\circ}$ C | < 15 ppm/ $^{\circ}$ C |
| Life (2000 h at + 70 $^{\circ}$ C) | 0.5 % | 0.0184 % |
| Life (10 000 h at + 70 $^{\circ}$ C) | 2.0 % | 0.04 % |

| MECHANICAL SPECIFICATIONS | |
|---------------------------|---------------------|
| Resistive Element | Passivated nichrome |
| Substrate Material | Alumina |
| Chip Terminations | Solder over nickel |
| Fused Solder | SN 60/40 |

FSCM CAGE # - 57489

| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | | | | |
|--|--|--|----------------|---|--------------|---|---|--|--|----|---|------|---|--------|--------------------|-----------|-------------|---------------------|--------------|
| New Global Part Numbering: M55342E06B1C00RTS V | | | | | | | | | | | | | | | | | | | |
| M | 5 | 5 | 3 | 4 | 2 | E | 0 | 6 | B | 1 | C | 0 | 0 | R | T | S | V | | |
| GLOBAL MODEL | TCR CHARACTERISTIC | CASE SIZE | TERMINATION | OHMIC VALUE | | | FAILURE RATE | PACKAGING | THIN FILM CODE (1) | | | | | | | | | | |
| M55342 or D55342 (/07 size only) | E = 25 ppm/ $^{\circ}$ C H = 50 ppm/ $^{\circ}$ C K = 100 ppm/ $^{\circ}$ C M = 300 ppm/ $^{\circ}$ C | 01 = 0502 02 = 0505 03 = 1005 04 = 1505 05 = 2208 06 = 0705 07 = 1206 08 = 2010 09 = 2512 10 = 1010 11 = 0402 12 = 0603 | B = Solderable | Three digits and a letter. Letter identifies tolerance, acts as multiplier and decimal locator. MULTIPLIER Tolerance 1 Ω 1 k Ω 1 M Ω 0.1 % A B C 1 % D E F 2 % G H T 5 % J K L 10 % M N P | | | M = 1.0 % per 1000 h P = 0.1 % per 1000 h R = 0.01 % per 1000 h C = Non ER version | Standard Packaging: BS = BULK 100 min. 1 mult WS = WAFFLE 100 min. 1 mult TAPE AND REEL T0 = 100 min. 100 mult T1 = 1000 min. 1000 mult T3 = 300 min. 300 mult T5 = 500 min. 500 mult TF = Full reel 4000 TS = 100 min. 1 mult Special Packaging: WAFFLE WI = 100 min. 1 mult (item single lot date code) WP = 100 min. 1 mult (package unit single lot date code) TAPE AND REEL TI = 100 min. 1 mult (item single lot date code) TP = 100 min. 1 mult (package unit single lot date code) | V for K and M TCR W/tolerance ≥ 1 % | | | | | | | | | | |
| Historical Part Number example: <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 5px; text-align: center;">M55342</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">K</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">06</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">B</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">5E60</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">R</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px; text-align: center;">SERIES</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">TCR CHARACTERISTIC</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">CASE SIZE</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">TERMINATION</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">VALUE AND TOLERANCE</td> <td style="border: 1px solid black; padding: 5px; text-align: center;">FAILURE RATE</td> </tr> </table> | | | | | | | | M55342 | K | 06 | B | 5E60 | R | SERIES | TCR CHARACTERISTIC | CASE SIZE | TERMINATION | VALUE AND TOLERANCE | FAILURE RATE |
| M55342 | K | 06 | B | 5E60 | R | | | | | | | | | | | | | | |
| SERIES | TCR CHARACTERISTIC | CASE SIZE | TERMINATION | VALUE AND TOLERANCE | FAILURE RATE | | | | | | | | | | | | | | |

Note

(1) Only add a V at the end of part number to specify Vishay Thin Film for K/M TCR and tolerance 1 % and higher



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.